
**Graphical symbols — Safety colours
and safety signs — Registered safety
signs**

*Symboles graphiques — Couleurs de sécurité et signaux de sécurité —
Signaux de sécurité enregistrés*



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Referents and categorization of safety signs	2
4.1 General	2
4.2 Referent (safety meaning)	2
4.3 Categorization of safety signs	8
5 Registered safety signs	9
Bibliography	298

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 145, *Graphical symbols*, Subcommittee SC 2, *Safety identification, signs, shapes, symbols and colours*.

This third edition cancels and replaces the second edition (ISO 7010:2011). The following changes have been made with respect to the previous edition:

The safety signs from

- ISO 7010:2011/Amd 1:2012,
- ISO 7010:2011/Amd 2:2012,
- ISO 7010:2011/Amd 3:2012,
- ISO 7010:2011/Amd 4:2013,
- ISO 7010:2011/Amd 5:2014,
- ISO 7010:2011/Amd 6:2014,
- ISO 7010:2011/Amd 7:2016,
- ISO 7010:2011/Amd 8:2017,
- ISO 7010:2011/Amd 9:2018,
- ISO 7010:2011/DAmD 240:2018,
- ISO 7010:2011/DAmD 241:2018,
- ISO 7010:2011/DAmD 242:2018 and
- ISO 20712-1:2008

have been incorporated with a few minor text adjustments.

This edition also cancels and replaces ISO 20712-1:2008.

All safety signs are available on the ISO Online browsing platform at <https://www.iso.org/obp>.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

There is a need to standardize a system of providing safety information that relies as little as possible on the use of words to achieve understanding.

Continued growth in international trade, travel and mobility of labour requires a common method of communicating safety information.

Lack of standardization may lead to confusion and the risk of accidents.

The use of standardized safety signs does not replace proper work methods, instructions and accident prevention training or measures. Education is an essential part of any system that provides safety information.

The safety signs are intended for use only where there is a risk to people. They may appear in safety signage in workplaces and public areas, safety manuals and notices, product labelling and escape and evacuation plans, as appropriate.

This document is intended to be used by all Technical Committees within ISO charged with developing specific safety signing for their industry, to ensure that there is only one safety sign for each safety meaning. It is also intended that this document be revised regularly to include safety signs as they are standardized by ISO, and which conform to the design principles given in the ISO 3864 series.

The safety signs in this document have been validated by ISO/TC 145/SC 2 according to procedures of standardization current at the time of publication.

NOTE 1 Some countries' statutory regulations might differ in some respects from those given in this document.

NOTE 2 Information on procedures, criteria of acceptability, safety sign templates and application of safety signs, as well as translations of the referents, can be found at <http://www.iso.org/tc145/sc2>.

Graphical symbols — Safety colours and safety signs — Registered safety signs

IMPORTANT — The colours represented in the electronic file of this document can be neither viewed on screen nor printed as true representations. For the purposes of colour matching, see ISO 3864-4 which provides colorimetric and photometric properties together with, as a guideline, references from colour order systems.

1 Scope

This document prescribes safety signs for the purposes of accident prevention, fire protection, health hazard information and emergency evacuation.

The shape and colour of each safety sign are according to ISO 3864-1 and the design of the graphical symbols is according to ISO 3864-3.

This document is applicable to all locations where safety issues related to people need to be addressed. However, it is not applicable to the signalling used for guiding rail, road, river, maritime and air traffic and, in general, to those sectors subject to a regulation which may differ with regard to certain points of this document and of the ISO 3864 series.

This document specifies the safety sign originals that can be scaled for reproduction and application purposes.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3864-1, *Graphical symbols — Safety colours and safety signs — Part 1: Design principles for safety signs and safety markings*

ISO 3864-3, *Graphical symbols — Safety colours and safety signs — Part 3: Design principles for graphical symbols for use in safety signs*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <http://www.electropedia.org/>

3.1

image content

written description of the elements of a graphical symbol or safety sign and their relative disposition

3.2

referent

idea or object that a graphical symbol is intended to represent

3.3

safety sign

sign giving a general safety message, obtained by a combination of a colour and geometric shape and which, by the addition of a graphical symbol, gives a particular safety message

3.4

safety sign original

safety sign with which a referent, a graphical representation and a description of the application are associated

3.5

supplementary sign

sign that is supportive of another sign and the main purpose of which is to provide additional clarification

4 Referents and categorization of safety signs

4.1 General

The summaries in 4.2 and 4.3 are provided to facilitate the search for registered safety signs.

This document will be maintained electronically through the use of a database. The indexes of this database will be used in these summaries as search engines with each registered safety sign having a unique reference number.

4.2 Referent (safety meaning)

Table 1 gives the list of referents in alphabetical order and provides the safety sign functional reference number.

Table 1 — Summary of referents in alphabetical order

Referent (safety meaning)	Functional reference number
Alighting from toboggan to the left	M050
Alighting from toboggan to the right	M051
Arc flash; warning	W042
Asphyxiating atmosphere; warning	W041
Automated external heart defibrillator	E010
Automatic start-up; warning	W018
Barbed wire; warning	W033
Battery charging; warning	W026
Biological hazard; warning	W009
Boating area; warning	W058
Break to obtain access	E008
Bull; warning	W034
Check guard	M027
Child seat presence and orientation detection system (CPOD)	E014
Child's lifejacket	E045
Close and secure hatches in launch sequence	M037
Close safety bar of chairlift	M033
Connect an earth terminal to the ground	M005
Corrosive substance; warning	W023

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Counterrotating rollers; warning	W025
Crocodiles, alligators or caymans; warning	W067
Crushing; warning	W019
Crushing of hands; warning	W024
Davit-launched liferaft	E039
Deep shelving beach; warning	W066
Deep water; warning	W047
Disconnect before carrying out maintenance or repair	M021
Disconnect mains plug from electrical outlet	M006
Doctor	E009
Do not alter the state of the switch	P031
Do not expose to direct sunlight or hot surface	P068
Do not extinguish with water	P011
Do not leave the tow-track	P037
Do not obstruct	P023
Do not put finger into the nozzle of a hydromassage	P070
Do not ram into toboggans	P047
Do not set off fireworks	P040
Do not spray with water	P016
Do not stretch out of toboggan	P046
Do not swing the chair	P038
Do not tie knots in rope	P030
Do not touch	P010
Do not use for face grinding	P032
Do not use for wet grinding	P033
Do not use lift in the event of fire	P020
Do not use this device in a bathtub, shower or water-filled reservoir	P026
Do not use this incomplete scaffold	P025
Do not use this lift for people	P027
Do not use with hand-held grinding machine	P034
Do not walk or stand here	P024
Do not wear gloves	P028
Do not wear metal-studded footwear	P035
Door opens by pulling on the left-hand side	E057
Door opens by pulling on the right-hand side	E058
Door opens by pushing on the left-hand side	E022
Door opens by pushing on the right-hand side	E023
Door slides left to open	E034
Door slides right to open	E033
Drinking water	E015
Drop (fall); warning	W008
Electricity; warning	W012
Embarkation ladder	E053
Emergency escape breathing device	E029

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Emergency exit (left hand)	E001
Emergency exit (right hand)	E002
Emergency exit for people unable to walk or with walking impairment (left)	E026
Emergency exit for people unable to walk or with walking impairment (right)	E030
Emergency hammer	E025
Emergency position indicating radio beacon	E052
Emergency stop button	E020
Emergency telephone	E004
Emergency window with escape ladder	E016
Escape ladder	E059
Evacuation assembly point	E007
Evacuation chair	E060
Evacuation temporary refuge	E024
Explosive material; warning	W002
Eyewash station	E011
Falling ice; warning	W039
Falling objects; warning	W035
Fire alarm call point	F005
Fire blanket	F016
Fire emergency telephone	F006
Fire extinguisher	F001
Firefighting equipment, collection of	F004
Fire hose reel	F002
Fire monitor	F015
Fire ladder	F003
Fire protection door	F007
First aid	E003
Fixed fire extinguishing battery	F008
Fixed fire extinguishing bottle	F013
Fixed fire extinguishing installation	F012
Flammable material; warning	W021
Floor-level obstacle; warning	W007
Forklift trucks and other industrial vehicles; warning	W014
Fragile roof; warning	W036
General mandatory action sign	M001
General prohibition sign	P001
General warning sign	W001
Guard dog; warning	W013
Hand crushing between press brake and material; warning	W031
Hand crushing between press brake tool; warning	W030
High surf or large breaking waves; warning	W065
Hot surface; warning	W017

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Hot works prohibited	P039
Immediately leave the tow-track in the event of falling	M035
Incoming tides; warning	W060
Infant's lifejacket	E046
Keep children under supervision in the aquatic environment	M054
Keep distance between toboggans	M052
Keep locked	M028
Kite surfing; warning	W062
Laser beam; warning	W004
Lifeboat	E036
Lifebuoy	E040
Lifebuoy with light	E042
Lifebuoy with line	E041
Lifebuoy with line and light	E043
Lifejacket	E044
Liferaft	E038
Liferaft knife	E035
Lift ski tips	M036
Line-throwing appliance	E050
Low temperature/freezing conditions; warning	W010
Lower lifeboat to the water in launch sequence	M039
Lower liferaft to the water in launch sequence	M040
Lower rescue boat to the water in launch sequence	M041
Magnetic field; warning	W006
Marine evacuation chute	E055
Marine evacuation slide	E054
Medical grab bag	E027
No access for forklift trucks and other industrial vehicles	P006
No access for people with active implanted cardiac devices	P007
No access for people with metallic implants	P014
No activated mobile phones	P013
No body boarding	P063
No children allowed	P036
No climbing	P009
No diving	P052
No dogs	P021
No eating or drinking	P022
No heavy load	P012
No jumping into water	P061
No kite surfing	P065
No leaning against	P041
No manually powered craft	P055
No mechanically powered craft	P056
No metallic articles or watches	P008

Table 1 (continued)

Referent (safety meaning)	Functional reference number
No open flame; Fire, open ignition source and smoking prohibited	P003
No outdoor footwear	P060
No parasailing	P066
No personal water craft	P057
No photography	P029
No pushing	P017
No pushing into water	P062
No reaching in	P015
No running	P048
No sailing	P053
No sand yachting	P067
No sitting	P018
No smoking	P002
No snorkelling	P050
No stepping on surface	P019
No sub-aqua diving	P051
No surf craft	P059
No surfing between the red-and-yellow flags	P064
No swimming	P049
No thoroughfare	P004
No towed water activity	P058
No windsurfing	P054
Non-ionizing radiation; warning	W005
Not drinking water	P005
Not for people in the state of intoxication	P043
Not for pregnant women	P042
Not to be serviced by users	P069
Opaque eye protection must be worn	M007
Open safety bar of chairlift	M034
Optical radiation; warning	W027
Overhead load; warning	W015
Overhead obstacle; warning	W020
Oxidizing substance; warning	W028
Oxygen resuscitator	E028
Parasailing; warning	W063
Portable foam applicator unit	F010
Pressurized cylinder; warning	W029
Protect infant's eyes with opaque eye protection	M025
Protection shelter	E021
Quicksand or mud/deep mud or silt; warning	W061
Radioactive material or ionizing radiation; warning	W003
Rapid movement of workpiece in press brake; warning	W032
Refer to instruction manual/booklet	M002
Remote release station	F014

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Release falls in launch sequence	M042
Release lifeboat gripes in launch sequence	M045
Rescue boat	E037
Rescue window	E017
Rocket parachute flare	E049
Roof avalanche; warning	W040
Run over by remote operator-controlled machine; warning	W037
Safety shower	E012
Sand yachting; warning	W059
Search and rescue transponder	E047
Secure gas cylinders	M046
Sewage effluent outfall; warning	W055
Shallow water (diving); warning	W048
Sharks; warning	W054
Sharp element; warning	W022
Shipboard assembly station	E032
Shipboard general alarm	E031
Slippery surface; warning	W011
Slipway; warning	W044
Sound horn	M029
Start air supply in launch sequence	M044
Start engine in launch sequence	M038
Start water spray in launch sequence	M043
Stretcher	E013
Strong currents; warning	W057
Strong winds; warning	W064
Submerged objects; warning	W049
Sudden drop in swimming or leisure pools; warning	W050
Sudden loud noise; warning	W038
Surf craft area; warning	W046
Survival clothing	E056
Survival craft distress signals	E048
Thin ice; warning	W043
Towed water activity area; warning	W045
Toxic material; warning	W016
Tsunami evacuation area	E062
Tsunami evacuation building	E063
Tsunami hazard zone; warning	W056
Turn anticlockwise to open	E018
Turn clockwise to open	E019
Two-way VHF radiotelephone apparatus	E051
Unprotected edges; warning	W051
Unstable cliff; warning	W053
Unstable cliff edge; warning	W052

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Use barrier cream	M022
Use footbridge	M023
Use gas detector	M048
Use handrail	M012
Use litter bin	M030
Use of smart glasses prohibited	P044
Use protective apron	M026
Use self-contained breathing appliance	M047
Use table saw adjustable guard	M031
Use this walkway	M024
Wash your hands	M011
Water fog applicator	F011
Water life-saving equipment	E061
Wear anti-static footwear	M032
Wear ear protection	M003
Wear eye protection	M004
Wear a face shield	M013
Wear head protection	M014
Wear high-visibility clothing	M015
Wear a mask	M016
Wear personal flotation devices	M053
Wear protective clothing	M010
Wear protective gloves	M009
Wear protective roller sport equipment	M049
Wear respiratory protection	M017
Wear safety belts	M020
Wear safety footwear	M008
Wear a safety harness	M018
Wear a welding mask	M019
Wheeled fire extinguisher	F009

4.3 Categorization of safety signs

Safety signs are categorized according to their function as follows:

- E is the category for signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs);
- F is the category for fire equipment signs;
- M is the category for mandatory action signs;
- P is the category for prohibition signs;
- W is the category for warning signs.

[Table 2](#) summarizes the registered safety signs in terms of safety sign category in accordance with ISO 3864-1.

5 Registered safety signs

[Tables 3 to 7](#) give safety sign originals in a uniform 70 mm size with corner marks to enable accurate enlargement and reduction scaling. The sign illustrations are shown without borders in order to allow for consistent reproduction scaling, though a border can be useful to achieve a luminance contrast between the safety sign and its background when mounted or displayed. The safety signs should be reproduced exactly as shown in [Tables 3 to 7](#). However, some degree of graphical modification is permitted when cultural differences or special application formats need to be considered, provided the original meaning is retained and comprehension of the safety sign is maintained. Consistent reproduction and use of these safety signs will lead to a progressively improved degree of comprehension at the international level.

In cases where the orientation of the graphical symbol is not essential to the meaning of the safety sign, the graphical symbol may be reproduced in a mirrored form. For prohibition signs, it is essential that the prohibition bar does not obscure significant details of the graphical symbol.

NOTE The graphical symbol is the complete image containing all the graphical symbol elements as shown in the registered safety sign.

Where a registered safety sign is not available to indicate a particular desired meaning, the meaning shall be obtained either by developing a new safety sign following the design principles of ISO 3864-1 and ISO 3864-3 or by using the appropriate general sign (ISO 7010-M001, ISO 7010-P001, ISO 7010-W001), together with supplementary safety information.

[Tables 3 to 7](#) give a description of the application of each safety sign and present the safety sign originals according to their category as follows:

- E: signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs) see [Table 3](#);
- F: fire equipment signs see [Table 4](#);
- M: mandatory action signs see [Table 5](#);
- P: prohibition signs see [Table 6](#);
- W: warning signs see [Table 7](#).

Table 2 — Summary of all safety signs
















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E001	F001	M001	P001	W001
Referent	Emergency exit (left hand)	Fire extinguisher	General mandatory action sign	General prohibition sign	General warning sign
Safety sign					
Reference number	E002	F002	M002	P002	W002
Referent	Emergency exit (right hand)	Fire hose reel	Refer to instruction manual/booklet	No smoking	Warning; Explosive material
Safety sign					
Reference number	E003	F003	M003	P003	W003
Referent	First aid	Fire ladder	Wear ear protection	No open flame; Fire, open ignition source and smoking prohibited	Warning; Radioactive material or ionizing radiation

Table 2 (continued)












	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E004	F004	M004	P004	W004
Referent	Emergency telephone	Collection of firefighting equipment	Wear eye protection	No thoroughfare	Warning; Laser beam
Safety sign	withdrawn				
Reference number	E005	F005	M005	P005	W005
Referent	Direction, arrow (90° increments), safe condition	Fire alarm call point	Connect an earth terminal to the ground	Not drinking water	Warning; Non-ionizing radiation
Safety sign	withdrawn				
Reference number	E006	F006	M006	P006	W006
Referent	Direction, 45° arrow (90° increments), safe condition	Fire emergency telephone	Disconnect mains plug from electrical outlet	No access for forklift trucks and other industrial vehicles	Warning; Magnetic field

Table 2 (continued)





















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E007	F007	M007	P007	W007
Referent	Evacuation assembly point	Fire protection door	Opaque eye protection must be worn	No access for people with active implanted cardiac devices	Warning; Floor-level obstacle
Safety sign					
Reference number	E008	F008	M008	P008	W008
Referent	Break to obtain access	Fixed fire extinguishing battery	Wear safety footwear	No metallic articles or watches	Warning; Drop (fall)
Safety sign					
Reference number	E009	F009	M009	P009	W009
Referent	Doctor	Wheeled fire extinguisher	Wear protective gloves	No climbing	Warning; Biological hazard
Safety sign					
Reference number	E010	F010	M010	P010	W010
Referent	Automated external heart defibrillator	Portable foam applicator unit	Wear protective clothing	Do not touch	Warning; Low temperature/freezing conditions

Table 2 (continued)










	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E011	F011	M011	P011	W011
Referent	Eyewash station	Water fog applicator	Wash your hands	Do not extinguish with water	Warning; Slippery surface
Safety sign					
Reference number	E012	F012	M012	P012	W012
Referent	Safety shower	Fixed fire extinguishing installation	Use handrail	No heavy load	Warning; Electricity
Safety sign					
Reference number	E013	F013	M013	P013	W013
Referent	Stretcher	Fixed fire extinguishing bottle	Wear a face shield	No activated mobile phones	Warning; Guard dog
Safety sign					
Reference number	E014	F014	M014	P014	W014
Referent	Child seat presence and orientation detection system (CPOD)	Remote release station	Wear head protection	No access for people with metallic implants	Warning; Forklift trucks and other industrial vehicles

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E015	F015	M015	P015	W015
Referent	Drinking water	Fire monitor	Wear high-visibility clothing	No reaching in	Warning; Overhead load
Safety sign					
Reference number	E016	F016	M016	P016	W016
Referent	Emergency window with escape ladder	Fire blanket	Wear a mask	Do not spray with water	Warning; Toxic material
Safety sign		—			
Reference number	E017	—	M017	P017	W017
Referent	Rescue window	—	Wear respiratory protection	No pushing	Warning; Hot surface
Safety sign		—			
Reference number	E018	—	M018	P018	W018
Referent	Turn anticlockwise to open	—	Wear a safety harness	No sitting	Warning; Automatic start-up

Table 2 (continued)

















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E019	—	M019	P019	W019
Referent	Turn clockwise to open	—	Wear a welding mask	No stepping on surface	Warning; Crushing
Safety sign		—			
Reference number	E020	—	M020	P020	W020
Referent	Emergency stop button	—	Wear safety belts	Do not use lift in the event of fire	Warning; Overhead obstacle
Safety sign		—			
Reference number	E021	—	M021	P021	W021
Referent	Protection shelter	—	Disconnect before carrying out maintenance or repair	No dogs	Warning; Flammable material
Safety sign		—			
Reference number	E022	—	M022	P022	W022
Referent	Door opens by pushing on the left-hand side	—	Use barrier cream	No eating or drinking	Warning; Sharp element

Table 2 (continued)

















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E023	—	M023	P023	W023
Referent	Door opens by pushing on the right-hand side	—	Use footbridge	Do not obstruct	Warning; Corrosive substance
Safety sign		—			
Reference number	E024	—	M024	P024	W024
Referent	Evacuation temporary refuge	—	Use this walkway	Do not walk or stand here	Warning; Crushing of hands
Safety sign		—			
Reference number	E025	—	M025	P025	W025
Referent	Emergency hammer	—	Protect infant's eyes with opaque eye protection	Do not use this incomplete scaffold	Warning; Counterrotating rollers
Safety sign		—			
Reference number	E026	—	M026	P026	W026
Referent	Emergency exit for people unable to walk or with walking impairment (left)	—	Use protective apron	Do not use this device in a bathtub, shower, or water-filled reservoir	Warning; Battery charging

Table 2 (continued)













	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E027	—	M027	P027	W027
Referent	Medical grab bag	—	Check guard	Do not use this lift for people	Warning; Optical radiation
Safety sign		—			
Reference number	E028	—	M028	P028	W028
Referent	Oxygen resuscitator	—	Keep locked	Do not wear gloves	Warning; Oxidizing substance
Safety sign		—			
Reference number	E029	—	M029	P029	W029
Referent	Emergency escape breathing device	—	Sound horn	No photography	Warning; Pressurized cylinder

Table 2 (continued)













	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E030	—	M030	P030	W030
Referent	Emergency exit for people unable to walk or with walking impairment (right)	—	Use litter bin	Do not tie knots in rope	Warning; Hand crushing between press brake tool
Safety sign		—			
Reference number	E031	—	M031	P031	W031
Referent	Shipboard general alarm	—	Use table saw adjustable guard	Do not alter the state of the switch	Warning; Hand crushing between press brake and material
Safety sign		—			
Reference number	E032	—	M032	P032	W032
Referent	Shipboard assembly station	—	Wear anti-static footwear	Do not use for face grinding	Warning; Rapid movement of workpiece in press brake

Table 2 (continued)

















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E033	—	M033	P033	W033
Referent	Door slides right to open	—	Close safety bar of chairlift	Do not use for wet grinding	Warning; Barbed wire
Safety sign		—			
Reference number	E034	—	M034	P034	W034
Referent	Door slides left to open	—	Open safety bar of chairlift	Do not use with hand-held grinding machine	Warning; Bull
Safety sign		—			
Reference number	E035	—	M035	P035	W035
Referent	Liferaft knife	—	Immediately leave the tow-track in the event of falling	Do not wear metal-studded footwear	Warning; Falling objects
Safety sign		—			
Reference number	E036	—	M036	P036	W036
Referent	Lifeboat	—	Lift ski tips	No children allowed	Warning; Fragile roof

Table 2 (continued)

















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E037	—	M037	P037	W037
Referent	Rescue boat	—	Close and secure hatches in launch sequence	Do not leave the tow-track	Warning; Run over by remote operator-controlled machine
Safety sign		—			
Reference number	E038	—	M038	P038	W038
Referent	Liferaft	—	Start engine in launch sequence	Do not swing the chair	Warning; Sudden loud noise
Safety sign		—			
Reference number	E039	—	M039	P039	W039
Referent	Davit-launched liferaft	—	Lower liferaft to the water in launch sequence	Hot works prohibited	Warning; Falling ice
Safety sign		—			
Reference number	E040	—	M040	P040	W040
Referent	Lifebuoy	—	Lower liferaft to the water in launch sequence	Do not set off fireworks	Warning; Roof avalanche

Table 2 (continued)

















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E041	—	M041	P041	W041
Referent	Lifebuoy with line	—	Lower rescue boat to the water in launch sequence	No leaning against	Warning; Asphyxiating atmosphere
Safety sign		—			
Reference number	E042	—	M042	P042	W042
Referent	Lifebuoy with light	—	Release falls in launch sequence	Not for pregnant women	Warning; Arc flash
Safety sign		—			
Reference number	E043	—	M043	P043	W043
Referent	Lifebuoy with line and light	—	Start water spray in launch sequence	Not for people in the state of intoxication	Warning; Thin ice
Safety sign		—			
Reference number	E044	—	M044	P044	W044
Referent	Lifejacket	—	Start air supply in launch sequence	Use of smart glasses prohibited	Warning; Slipway

Table 2 (continued)
















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p>E045</p> <p>Child's lifejacket</p>	—	 <p>M045</p> <p>Release lifeboat gripes in launch sequence</p>	—	 <p>W045</p> <p>Warning; Towed water activity area</p>
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p>E046</p> <p>Infant's lifejacket</p>	—	 <p>M046</p> <p>Secure gas cylinders</p>	 <p>P046</p> <p>Do not stretch out of toboggan</p>	 <p>W046</p> <p>Warning; Surf craft area</p>
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p>E047</p> <p>Search and rescue transponder</p>	—	 <p>M047</p> <p>Use self-contained breathing appliance</p>	 <p>P047</p> <p>Do not ram into toboggan</p>	 <p>W047</p> <p>Warning; Deep water</p>
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p>E048</p> <p>Survival craft distress signals</p>	—	 <p>M048</p> <p>Use gas detector</p>	 <p>P048</p> <p>No running</p>	 <p>W048</p> <p>Warning; Shallow water (diving)</p>

Table 2 (continued)

















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E049	—	M049	P049	W049
Referent	Rocket parachute flare	—	Wear protective roller sport equipment	No swimming	Warning; Submerged objects
Safety sign		—			
Reference number	E050	—	M050	P050	W050
Referent	Line-throwing appliance	—	Alighting from toboggan to the left	No snorkelling	Warning; Sudden drop in swimming or leisure pools
Safety sign		—			
Reference number	E051	—	M051	P051	W051
Referent	Two-way VHF radiotelephone apparatus	—	Alighting from toboggan to the right	No sub-aqua diving	Warning; Unprotected edges
Safety sign		—			
Reference number	E052	—	M052	P052	W052
Referent	Emergency position indicating radio beacon	—	Keep distance between toboggans	No diving	Warning; Unstable cliff edge

Table 2 (continued)















	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E053	—	M053	P053	W053
Referent	Embarkation ladder	—	Wear personal flotation devices	No sailing	Warning; Unstable cliff
Safety sign		—			
Reference number	E054	—	M054	P054	W054
Referent	Marine evacuation slide	—	Keep children under supervision in the aquatic environment	No windsurfing	Warning; Sharks
Safety sign		—	—		
Reference number	E055	—	—	P055	W055
Referent	Marine evacuation chute	—	—	No manually powered craft	Warning; Sewage effluent outfall
Safety sign		—	—		
Reference number	E056	—	—	P056	W056
Referent	Survival clothing	—	—	No mechanically powered craft	Warning; Tsunami hazard zone

Table 2 (continued)













	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—	—		
Reference number	E057	—	—	P057	W057
Referent	Door opens by pulling on the left-hand side	—	—	No personal water craft	Warning; Strong currents
Safety sign		—	—		
Reference number	E058	—	—	P058	W058
Referent	Door opens by pulling on the right-hand side	—	—	No towed water activity	Warning; Boating area
Safety sign		—	—		
Reference number	E059	—	—	P059	W059
Referent	Escape ladder	—	—	No surf craft	Warning; Sand yachting
Safety sign		—	—		
Reference number	E060	—	—	P060	W060
Referent	Evacuation chair	—	—	No outdoor footwear	Warning; Incoming tides

Table 2 (continued)













	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<p>Safety sign</p>  <p>Reference number</p> <p>Referent</p>	<p>E061</p> <p>Water life-saving equipment</p>	—	—	 <p>P061</p> <p>No jumping into water</p>	 <p>W061</p> <p>Warning; Quicksand or mud/deep mud or silt</p>
<p>Safety sign</p>  <p>Reference number</p> <p>Referent</p>	<p>E062</p> <p>Tsunami evacuation area</p>	—	—	 <p>P062</p> <p>No pushing into water</p>	 <p>W062</p> <p>Warning; Kite surfing</p>
<p>Safety sign</p>  <p>Reference number</p> <p>Referent</p>	<p>E063</p> <p>Tsunami evacuation building</p>	—	—	 <p>P063</p> <p>No body boarding</p>	 <p>W063</p> <p>Warning; Parasailing</p>
<p>Safety sign</p>  <p>Reference number</p> <p>Referent</p>	—	—	—	 <p>P064</p> <p>No surfing between the red-and-yellow flags</p>	 <p>W064</p> <p>Warning; Strong winds</p>

Table 2 (continued)








	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign	—	—	—		
Reference number	—	—	—	P065	W065
Referent	—	—	—	No kite surfing	Warning; High surf or large breaking waves
Safety sign	—	—	—		
Reference number	—	—	—	P066	W066
Referent	—	—	—	No parasailing	Warning; Deep shelving beach
Safety sign	—	—	—		
Reference number	—	—	—	P067	W067
Referent	—	—	—	No sand yachting	Warning; Crocodiles, alligators or caymans
Safety sign	—	—	—		—
Reference number	—	—	—	P068	—
Referent	—	—	—	Do not expose to direct sunlight or hot surface	—

Table 2 (continued)



	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign	—	—	—		—
Reference number	—	—	—	P069	—
Referent	—	—	—	Not to be serviced by users	—
Safety sign	—	—	—		—
Reference number	—	—	—	P070	—
Referent	—	—	—	Do not put finger into the nozzle of a hydromassage	—

Table 3 — Description and application of referent for signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs) (category E)




	Reference No. <p style="text-align: center;">ISO 7010-E001</p>
	Referent <p style="text-align: center;">Emergency exit (left hand)</p>
	Function <p>To indicate an escape route to a place of safety</p>
	Image content <p>Human figure moving (to the left) through doorway</p>
<p>Hazard Not being able to locate an escape route to a place of safety which is provided for evacuation</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an escape route to a place of safety</p> <p>Additional information Test data obtained according to ISO 9186-1 are not available. However, this safety sign has been the subject of extensive research in Japan and the design selected has received the best comprehension results. A supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information (direction examples, the arrows may be rotated in increments of 45°):</p> <div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p>See ISO 16069:2017, Figure 1 for examples and meanings of combinations of the exit sign with the supplementary arrow sign.</p>	

Table 3 (continued)




	Reference No. <p style="text-align: center;">ISO 7010-E002</p>
	Referent <p style="text-align: center;">Emergency exit (right hand)</p>
	Function <p>To indicate an escape route to a place of safety</p>
	Image content <p>Human figure moving (to the right) through doorway</p>
<p>Hazard Not being able to locate an escape route to a place of safety which is provided for evacuation</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an escape route to a place of safety</p> <p>Additional information Test data obtained according to ISO 9186-1 are not available. However, this safety sign has been the subject of extensive research in Japan and the design selected has received the best comprehension results. A supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information (direction examples, the arrows may be rotated in increments of 45°):</p> <div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p>See ISO 16069:2017, Figure 1 for examples and meanings of combinations of the exit sign with the supplementary arrow sign.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E003</p>
	Referent <p style="text-align: center;">First aid</p>
	Function To indicate the location of first aid equipment or facilities or staff
	Image content First aid cross
Hazard Not being able to locate first aid equipment or facilities or staff	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of first aid equipment or facilities or staff	
Additional information This safety sign should be used for first aid equipment or facilities or staff for which/whom there is no registered safety sign. The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E004</p>
	<p>Referent</p> <p>Emergency telephone</p>
	<p>Function</p> <p>To indicate the location of an emergency telephone</p>
	<p>Image content</p> <p>Telephone receiver (profile), first aid cross</p>
<p>Hazard</p> <p>Not being able to locate an emergency telephone</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an emergency telephone</p>	
<p>Additional information</p> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

withdrawn	Reference No. ISO 7010-E005
	Referent Direction, arrow (90° increments), safe condition
	Function
	Image content
<p>Hazard</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Additional information This sign has been withdrawn as a registered safety sign, since it is to be used as a supplementary sign only.</p>	

Table 3 (continued)

withdrawn	Reference No. ISO 7010-E006
	Referent Direction, 45° arrow (90° increments), safe condition
	Function
	Image content
<p>Hazard</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Additional information This sign has been withdrawn as a registered safety sign, since it is to be used as a supplementary sign only.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E007</p>
	Referent <p style="text-align: center;">Evacuation assembly point</p>
	Function To indicate the location of a safe assembly point following evacuation
	Image content Two human figures and a head of a third figure in a group, four arrows coming from the corners pointing to them
Hazard Not being able to locate a safe assembly point following evacuation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the evacuation assembly point which is provided to enable people to be accounted for following the evacuation of a building or premises	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E008</p>
	<p>Referent</p> <p style="text-align: center;">Break to obtain access</p>
	<p>Function</p> <p>To indicate a cover which requires breaking to obtain access to an emergency exit device</p>
	<p>Image content</p> <p>Human fist and lower arm (outlined) holding a bar, uneven star shape</p>
<p>Hazard</p> <p>Not being able to open an emergency exit device</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Breaking the cover to gain access to the device that operates an emergency exit</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E009
	Referent Doctor
	Function To indicate the location of a doctor for emergencies
	Image content Upper human figure with stethoscope, first aid cross
Hazard Not being able to locate an emergency doctor	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an emergency doctor	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E010</p>
	<p>Referent</p> <p>Automated external heart defibrillator</p>
	<p>Function</p> <p>To indicate the location of an automated external heart defibrillator</p>
	<p>Image content</p> <p>Heart with lightning bolt in the middle, first aid cross</p>
<p>Hazard</p> <p>Not being able to locate an automated external heart defibrillator</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an automated external heart defibrillator</p> <p>Additional information</p> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	Reference No. ISO 7010-E011
	Referent Eyewash station
	Function To indicate the location of an eyewash station
	Image content Eye above running water coming out of a shower head, first aid cross
Hazard Not being able to locate an eyewash station	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an eyewash station	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

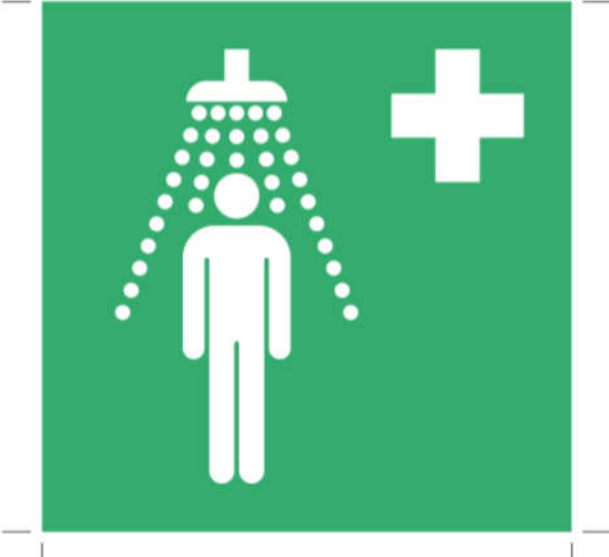
	<p>Reference No.</p> <p>ISO 7010-E012</p>
	<p>Referent</p> <p>Safety shower</p>
	<p>Function</p> <p>To indicate the location of a safety shower</p>
	<p>Image content</p> <p>Human figure under running water coming out of a shower head, first aid cross</p>
<p>Hazard</p> <p>Not being able to locate a safety shower</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a safety shower</p> <p>Additional information</p> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E013
	Referent Stretcher
	Function To indicate the location of a stretcher
	Image content Human figure on a stretcher, first aid cross
Hazard Not being able to locate a stretcher	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a stretcher	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E014</p>
	<p>Referent</p> <p style="text-align: center;">Child seat presence and orientation detection system (CPOD)</p>
	<p>Function</p> <p>To indicate that a CPOD-equipped child seat can safely be used on a CPOD-equipped passenger seat protected by a frontal airbag</p>
	<p>Image content</p> <p>Vehicle passenger seat, child in rear-facing child seat, dot, three curved lines of increasing size radiating from the dot, filled semi-circle</p>
<p>Hazard</p> <p>Without a CPOD system, a fully powered vehicle airbag can injure a child in a child seat when the airbag is deployed</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Installing a CPOD-equipped child seat on a passenger seat protected by a frontal airbag in a vehicle that recognizes the CPOD child seat</p>	
<p>Additional information</p> <p>This safety sign will be used along with a supplementary sign as part of a label for CPOD-equipped child seats or for vehicles equipped with the CPOD sensing system. These two signs are part of ISO/TS 22239-3.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E015</p>
	Referent <p style="text-align: center;">Drinking water</p>
	Function To indicate the location of drinking water
	Image content Tap above glass, two wavy lines
Hazard Not being able to locate drinking water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a water supply that is suitable for drinking	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E016</p>
	<p>Referent</p> <p style="text-align: center;">Emergency window with escape ladder</p>
	<p>Function</p> <p>To indicate the location of an emergency window for escape with a permanently fixed escape ladder</p>
	<p>Image content</p> <p>Human figure, window and a ladder on the left</p>
<p>Hazard</p> <p>Not being able to locate an emergency window for escape</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an emergency window</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E017</p>
	Referent <p style="text-align: center;">Rescue window</p>
	Function <p>To indicate the location of a rescue window where people can be rescued by a ladder by intervention forces</p>
	Image content <p>Human figure, window, firefighting vehicle with ladder</p>
<p>Hazard Not being able to locate a rescue window to be rescued by intervention forces</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a rescue window</p> <p>Additional information This safety sign shall be placed inside the building. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E018</p>
	<p>Referent</p> <p style="text-align: center;">Turn anticlockwise to open</p>
	<p>Function</p> <p>To signify that the doorknob of a security door on an escape route must be turned in an anticlockwise direction in order for the opening device to operate</p>
	<p>Image content</p> <p>Doorknob with semicircular anticlockwise arrow</p>
<p>Hazard</p> <p>Being unable to open a door on an escape route which has a security lock and an emergency opening device</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Turning the doorknob in an anticlockwise direction in order to open a door on an escape route which has a security lock</p> <p>Additional information</p> <p>This safety sign is intended to be used only on doors with a security locking mechanism.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E019</p>
	Referent <p style="text-align: center;">Turn clockwise to open</p>
	Function <p>To signify that the doorknob of a security door on an escape route must be turned in a clockwise direction in order for the opening device to operate</p>
	Image content <p>Doorknob with semicircular clockwise arrow</p>
<p>Hazard Being unable to open a door on an escape route which has a security lock and an emergency opening device</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Turning the doorknob in a clockwise direction in order to open a door on an escape route which has a security lock</p> <p>Additional information This safety sign is intended to be used only on doors with a security locking mechanism. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E020</p>
	<p>Referent</p> <p>Emergency stop button</p>
	<p>Function</p> <p>To indicate the location of an emergency stop button</p>
	<p>Image content</p> <p>Hand over button shape, two lines</p>
<p>Hazard</p> <p>Not being able to locate an emergency stop button</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an emergency stop button</p> <p>Additional information</p> <p>The actuator of the emergency stop device itself is likely to be coloured red (see e.g. ISO 13850, IEC 60601-1).</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E021</p>
	Referent <p style="text-align: center;">Protection shelter</p>
	Function To indicate the location of a protection shelter
	Image content Four human figures within an irregular hexagon, line and shield
Hazard Not being able to locate a protection shelter	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a protection shelter	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E022</p>
	<p>Referent</p> <p style="text-align: center;">Door opens by pushing on the left-hand side</p>
	<p>Function</p> <p>To indicate that the door opens by pushing on the left-hand side</p>
	<p>Image content</p> <p>Doorway with door opening outwards, curved arrow pointing to the left</p>
<p>Hazard</p> <p>Not being able to open the door</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware that the door opens by pushing on the left-hand side</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E023
	Referent Door opens by pushing on the right-hand side
	Function To indicate that the door opens by pushing on the right-hand side
	Image content Doorway with door opening outwards, curved arrow pointing to the right
Hazard Not being able to open the door	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware that the door opens by pushing on the right-hand side	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E024</p>
	<p>Referent</p> <p style="text-align: center;">Evacuation temporary refuge</p>
	<p>Function</p> <p>To indicate the location of a temporary safe area (refuge) to await rescue assistance, provided for those unable to use stairs in the event of an evacuation</p>
	<p>Image content</p> <p>Human figure in wheelchair (right-hand profile), four white arrows coming from the corners pointing to it</p>
<p>Hazard</p> <p>Not being able to locate an area provided for temporary waiting for rescue assistance for those unable to use stairs in the event of an evacuation</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an area provided for temporary waiting for rescue assistance for those unable to use stairs in the event of an evacuation</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E025
	Referent Emergency hammer
	Function To indicate the location of an emergency hammer
	Image content Emergency hammer with glass cracked around the point of the hammer
Hazard Not being able to locate an emergency hammer	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an emergency hammer	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E026</p>
	<p>Referent</p> <p>Emergency exit for people unable to walk or with walking impairment (left)</p>
	<p>Function</p> <p>To indicate an escape route to a place of safety usable by people unable to walk or with walking impairment</p>
	<p>Image content</p> <p>Human figure in wheelchair (left-hand profile), which drives through a door frame (left)</p>
<p>Hazard</p> <p>Not being able to locate an escape route to a place of safety, which is usable for the evacuation of people unable to walk or with walking impairment</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an escape route to a place of safety, which can be used by people unable to walk or with walking impairment</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available.</p> <p>Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information.</p> <p>This safety sign shall be accompanied by ISO 7010-E001 or ISO 7010-E002.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E027
	Referent Medical grab bag
	Function To indicate the location of a medical grab bag
	Image content Bag (outlined) with handles, first aid cross
Hazard Not being able to locate a medical grab bag	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a medical grab bag	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E028</p>
	<p>Referent</p> <p>Oxygen resuscitator</p>
	<p>Function</p> <p>To indicate the location of an oxygen resuscitator</p>
	<p>Image content</p> <p>Oxygen cylinder with manual control, hose line and mask, first aid cross</p>
<p>Hazard</p> <p>Not being able to locate an oxygen resuscitator</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an oxygen resuscitator</p> <p>Additional information</p> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E029
	Referent Emergency escape breathing device
	Function To indicate the location of an emergency escape breathing device (EEBD)
	Image content Full-face mask with regulator (front view), first aid cross
Hazard Not being able to locate an EEBD	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an EEBD	
Additional information The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E030</p>
	<p>Referent</p> <p style="text-align: center;">Emergency exit for people unable to walk or with walking impairment (right)</p>
	<p>Function</p> <p>To indicate an escape route to a place of safety usable by people unable to walk or with walking impairment</p>
	<p>Image content</p> <p>Human figure in wheelchair (right-hand profile), which drives through a door frame (right)</p>
<p>Hazard</p> <p>Not being able to locate an escape route to a place of safety, which is usable for the evacuation of people unable to walk or with walking impairment</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an escape route to a place of safety, which can be used by people unable to walk or with walking impairment</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information.</p> <p>This safety sign shall be accompanied by ISO 7010-E001 or ISO 7010-E002.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E031
	Referent Shipboard general alarm
	Function To indicate the location of a general alarm button on board ship
	Image content Circle in a square (outlined)
Hazard Not being able to locate a general alarm button on board ship	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Crew being aware of the location of a general alarm button	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E032</p>
	<p>Referent</p> <p style="text-align: center;">Shipboard assembly station</p>
	<p>Function</p> <p>To indicate the location of an assembly station on board ship</p>
	<p>Image content</p> <p>Five human figures in different sizes standing on a square, four arrows coming from the corners pointing to them</p>
<p>Hazard</p> <p>Not being able to locate an assembly station on board ship</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an assembly station on board ship</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

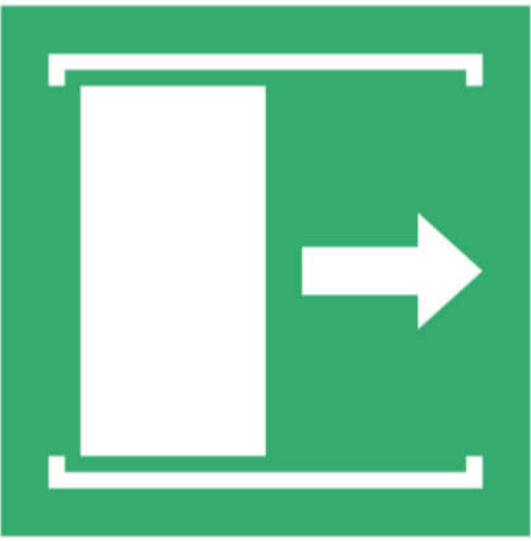
	Reference No. ISO 7010-E033
	Referent Door slides right to open
	Function To indicate the direction in which a sliding door opens
	Image content Rectangle bordered top and bottom, arrow pointing to the right
Hazard Not being able to determine the direction of movement of a sliding door	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being able to discern a sliding door which opens to the right	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

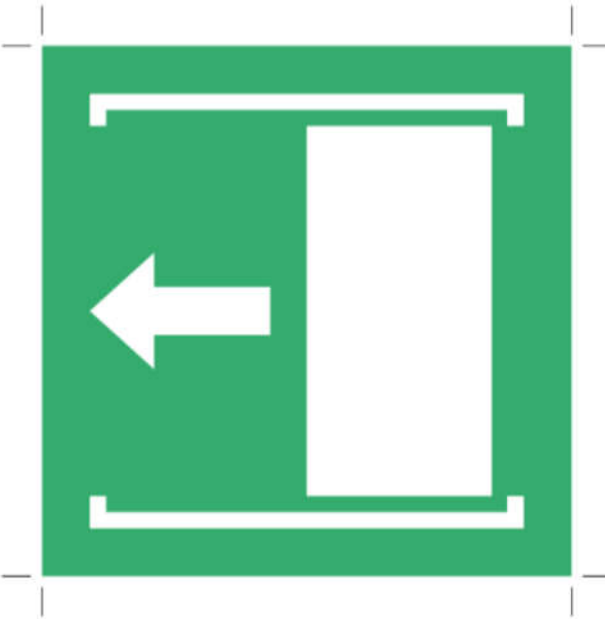
	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E034</p>
	<p>Referent</p> <p style="text-align: center;">Door slides left to open</p>
	<p>Function</p> <p>To indicate the direction in which a sliding door opens</p>
	<p>Image content</p> <p>Rectangle bordered top and bottom, arrow pointing to the left</p>
<p>Hazard</p> <p>Not being able to determine the direction of movement of a sliding door</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being able to discern a sliding door which opens to the left</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E035
	Referent Liferaft knife
	Function To indicate the location of a liferaft knife
	Image content Liferaft knife (with rounded tip and drilled-out holes in blade) between sliced braided rope
Hazard Not being able to locate a liferaft knife	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a liferaft knife	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

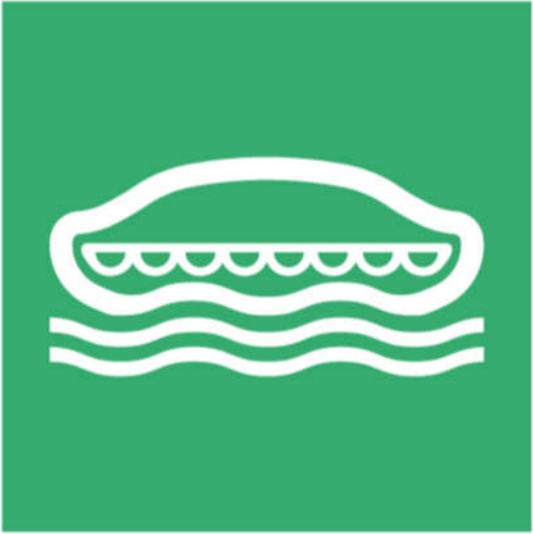
	<p>Reference No.</p> <p>ISO 7010-E036</p>
	<p>Referent</p> <p>Lifeboat</p>
	<p>Function</p> <p>To indicate the location of a lifeboat</p>
	<p>Image content</p> <p>Lifeboat, two wavy lines</p>
<p>Hazard</p> <p>Not being able to locate a lifeboat</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a lifeboat</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E037
	Referent Rescue boat
	Function To indicate the location of a rescue boat
	Image content Boat, two upper human figures, one of them outlined, two wavy lines
Hazard Not being able to locate a rescue boat	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a rescue boat	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E038</p>
	<p>Referent</p> <p>Liferaft</p>
	<p>Function</p> <p>To indicate the location of a liferaft</p>
	<p>Image content</p> <p>Liferaft, two wavy lines</p>
<p>Hazard</p> <p>Not being able to locate a liferaft</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a liferaft</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E039</p>
	Referent <p style="text-align: center;">Davit-launched liferaft</p>
	Function To indicate the location of a davit-launched liferaft
	Image content Liferaft suspended from single point davit
Hazard Not being able to locate a davit-launched liferaft	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a davit-launched liferaft	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E040</p>
	<p>Referent</p> <p style="text-align: center;">Lifebuoy</p>
	<p>Function</p> <p>To indicate the location of a lifebuoy</p>
	<p>Image content</p> <p>Ring buoy with four becketed lines</p>
<p>Hazard</p> <p>Not being able to locate a lifebuoy</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a lifebuoy</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E041</p>
	Referent <p style="text-align: center;">Lifebuoy with line</p>
	Function <p>To indicate the location of a lifebuoy with line</p>
	Image content <p>Ring buoy with four becketed lines and attached segmented line</p>
Hazard <p>Not being able to locate a lifebuoy with line</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Being aware of the location of a lifebuoy with line</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E042</p>
	<p>Referent</p> <p style="text-align: center;">Lifebuoy with light</p>
	<p>Function</p> <p>To indicate the location of a lifebuoy with light</p>
	<p>Image content</p> <p>Ring buoy with four becketed lines and attached light</p>
<p>Hazard</p> <p>Not being able to locate a lifebuoy with light</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a lifebuoy with light</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E043</p>
	Referent <p style="text-align: center;">Lifebuoy with line and light</p>
	Function <p>To indicate the location of a lifebuoy with line and light</p>
	Image content <p>Ring buoy with four becketed lines and attached segmented line and light</p>
Hazard <p>Not being able to locate a lifebuoy with line and light</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Being aware of the location of a lifebuoy with line and light</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

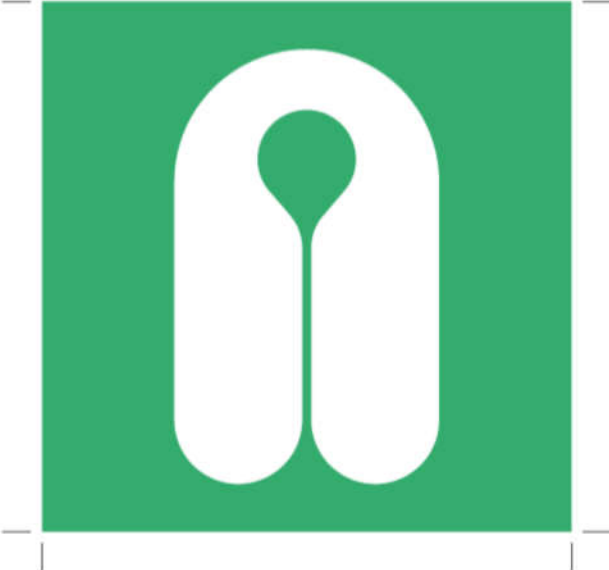
	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E044</p>
	<p>Referent</p> <p style="text-align: center;">Lifejacket</p>
	<p>Function</p> <p>To indicate the location of a lifejacket</p>
	<p>Image content</p> <p>Lifejacket</p>
<p>Hazard</p> <p>Not being able to locate a lifejacket</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a lifejacket</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-E045</p>
	Referent <p style="text-align: center;">Child's lifejacket</p>
	Function <p>To indicate the location of a child's lifejacket</p>
	Image content <p>Lifejacket with walking child on one lobe</p>
<p>Hazard Not being able to locate a child's lifejacket</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a child's lifejacket</p> <p>Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E046</p>
	<p>Referent</p> <p>Infant's lifejacket</p>
	<p>Function</p> <p>To indicate the location of an infant's lifejacket</p>
	<p>Image content</p> <p>Lifejacket with infant in diaper on one lobe</p>
<p>Hazard</p> <p>Not being able to locate an infant's lifejacket</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an infant's lifejacket</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E047
	Referent Search and rescue transponder
	Function To indicate the location of a search and rescue transponder (SART)
	Image content Transponder with arrow pointing towards antenna and an arrow pointing away
Hazard Not being able to locate a SART	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a SART	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E048</p>
	<p>Referent</p> <p>Survival craft distress signal</p>
	<p>Function</p> <p>To indicate the location of a survival craft distress signal</p>
	<p>Image content</p> <p>Bursting star at the end of a curved path of diminishing width</p>
<p>Hazard</p> <p>Not being able to locate a survival craft distress signal</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a survival craft distress signal</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E049
	Referent Rocket parachute flare
	Function To indicate the location of a rocket parachute flare
	Image content Bursting star suspended from a parachute
Hazard Not being able to locate a rocket parachute flare	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a rocket parachute flare	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E050</p>
	<p>Referent</p> <p>Line-throwing appliance</p>
	<p>Function</p> <p>To indicate the location of a line-throwing appliance</p>
	<p>Image content</p> <p>Barrel-mounted rocket with attached segmented line</p>
<p>Hazard</p> <p>Not being able to locate a line-throwing appliance</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a line-throwing appliance</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E051</p>
	<p>Referent</p> <p style="text-align: center;">Two-way VHF radiotelephone apparatus</p>
	<p>Function</p> <p>To indicate the location of a two-way VHF radiotelephone apparatus</p>
	<p>Image content</p> <p>Hand holding radiotelephone with three-prong antenna, three curved lines on each side</p>
<p>Hazard</p> <p>Not being able to locate a two-way VHF radiotelephone apparatus</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a two-way VHF radiotelephone apparatus</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E052</p>
	<p>Referent</p> <p>Emergency position indicating radio beacon</p>
	<p>Function</p> <p>To indicate the location of an emergency position indicating radio beacon (EPIRB)</p>
	<p>Image content</p> <p>Radio beacon with three-prong antenna, three curved lines on each side</p>
<p>Hazard</p> <p>Not being able to locate an EPIRB</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an EPIRB</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E053
	Referent Embarkation ladder
	Function To indicate the location of an embarkation ladder
	Image content Ladder (six horizontal lines between two parallel vertical lines), two wavy lines
Hazard Not being able to locate an embarkation ladder	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of an embarkation ladder	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E054</p>
	<p>Referent</p> <p style="text-align: center;">Marine evacuation slide</p>
	<p>Function</p> <p>To indicate the location of a marine evacuation slide</p>
	<p>Image content</p> <p>Slide terminating in open raft, two wavy lines</p>
<p>Hazard</p> <p>Not being able to locate a marine evacuation slide</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a marine evacuation slide</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

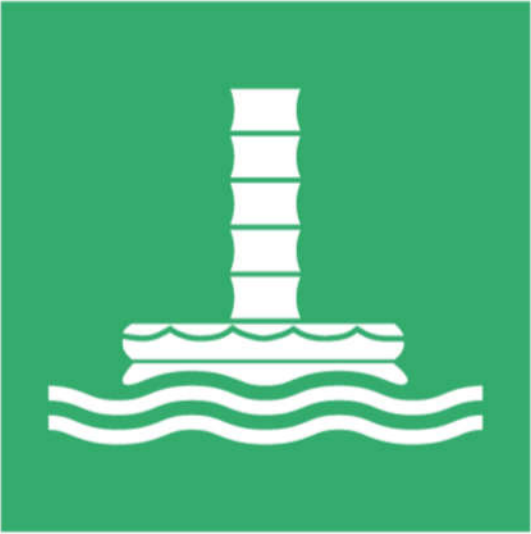
	Reference No. ISO 7010-E055
	Referent Marine evacuation chute
	Function To indicate the location of a marine evacuation chute
	Image content Chute, liferaft, two wavy lines
Hazard Not being able to locate a marine evacuation chute	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a marine evacuation chute	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E056</p>
	<p>Referent</p> <p>Survival clothing</p>
	<p>Function</p> <p>To indicate the location of survival clothing</p>
	<p>Image content</p> <p>Standing full body survival suit with hood</p>
<p>Hazard</p> <p>Not being able to locate survival clothing</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of survival clothing</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E057
	Referent Door opens by pulling on the left-hand side
	Function To indicate that the door opens by pulling on the left-hand side
	Image content Doorway with door opening inwards, curved arrow pointing to the right
Hazard Not being able to open the door	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware that the door opens by pulling on the left-hand side	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E058</p>
	<p>Referent</p> <p>Door opens by pulling on the right-hand side</p>
	<p>Function</p> <p>To indicate that the door opens by pulling on the right-hand side</p>
	<p>Image content</p> <p>Doorway with door opening inwards, curved arrow pointing to the left</p>
<p>Hazard</p> <p>Not being able to open the door</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware that the door opens by pulling on the right-hand side</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E059
	Referent Escape ladder
	Function To indicate the location of a permanently fixed escape ladder
	Image content Ladder (six horizontal lines between two parallel vertical lines)
Hazard Not being able to locate a fixed escape ladder and identify it as such	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fixed escape ladder	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)


	<p>Reference No.</p> <p>ISO 7010-E060</p>
	<p>Referent</p> <p>Evacuation chair</p>
	<p>Function</p> <p>To indicate the location of an evacuation chair</p>
	<p>Image content</p> <p>Human figure sitting in an evacuation chair, human figure handling the evacuation chair, staircase (all right-hand profile)</p>
<p>Hazard</p> <p>Not being able to locate an evacuation chair</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of an evacuation chair</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E061
	Referent Water life-saving equipment
	Function To indicate the location of water life-saving equipment
	Image content Lifebelt ring with rope
Hazard Not being able to locate the public rescue equipment which is provided to assist in the avoidance of drowning	
Human behaviour that is intended to be caused after understanding the safety sign's meaning People being aware of location of public rescue equipment at the time of need	
Additional information A supplementary sign shall be used to give further information about the kind of water life-saving equipment. Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 3 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-E062</p>
	<p>Referent</p> <p style="text-align: center;">Tsunami evacuation area</p>
	<p>Function</p> <p>To indicate the location of a safe place/uphill area for evacuation to in the event of a tsunami</p>
	<p>Image content</p> <p>Human figure (moving to the right) between a slope of land mass and a tsunami wave</p>
<p>Hazard</p> <p>Tsunami wave originating from an ocean-floor seismic event in which people could be caught if they have not reached the tsunami evacuation area</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Evacuation from coastal/beach zone towards higher place/hill in the event of an earthquake or when a tsunami warning has been issued</p>	
<p>Additional information</p> <p>This water safety sign has been the subject of extensive research by the Japanese government and has also been requested by UNESCO as part of an overall approach to a management strategy designed to mitigate the disastrous effects of a tsunami wave. The design selected has received the best comprehension results and is specific to the special circumstances of the tsunami hazard. Supplementary text shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)


	Reference No. ISO 7010-E063
	Referent Tsunami evacuation building
	Function To indicate the location of a safe building for evacuation in the event of a tsunami
	Image content Human figure between a building and a tsunami wave
Hazard Tsunami wave originating from an ocean-floor seismic event in which people could be caught if they have not reached the tsunami evacuation building	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Evacuation from coastal/beach zone towards a tsunami evacuation building in the event of an earthquake or when a tsunami warning has been issued	
Additional information This water safety sign has been the subject of extensive research by the Japanese government and has also been requested by UNESCO as part of an overall approach to a management strategy designed to mitigate the disastrous effects of a tsunami wave. The design selected has received the best comprehension results and is specific to the special circumstances of the tsunami hazard. Supplementary text shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 — Description and application of referent for fire equipment signs (category F)


	Reference No. <p style="text-align: center;">ISO 7010-F001</p>
	Referent <p style="text-align: center;">Fire extinguisher</p>
	Function <p>To indicate the location of a fire extinguisher</p>
	Image content <p>Fire extinguisher (profile) with label, flame determinant</p>
<p>Hazard Not being able to locate a fire extinguisher</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire extinguisher</p> <p>Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-F002</p>
	Referent <p style="text-align: center;">Fire hose reel</p>
	Function To indicate the location of a fire hose reel
	Image content Seven vertical lines, one with a trapezoid underneath, circle with cross and line attached to vertical bar, flame determinant
Hazard Not being able to locate a fire hose reel	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire hose reel	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)


	<p>Reference No.</p> <p>ISO 7010-F003</p>
	<p>Referent</p> <p>Fire ladder</p>
	<p>Function</p> <p>To indicate the location of a ladder that is to be used exclusively for firefighting</p>
	<p>Image content</p> <p>Two converging vertical lines, six horizontal lines joining the vertical lines, flame determinant</p>
<p>Hazard</p> <p>Not being able to locate a fire ladder</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a fire ladder and recognizing that the use of this ladder is dedicated to firefighting only</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)

	Reference No. <p style="text-align: center;">ISO 7010-F004</p>
	Referent <p style="text-align: center;">Collection of firefighting equipment</p>
	Function <p>To indicate the location of firefighting equipment</p>
	Image content <p>Fire helmet (profile), flame determinant</p>
<p>Hazard Not being able to locate firefighting equipment</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of firefighting equipment</p> <p>Additional information This safety sign should be used for firefighting equipment for which there is no registered safety sign. The fire helmet may be replaced with another fire helmet appropriate to cultural requirements. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)


	<p>Reference No.</p> <p>ISO 7010-F005</p>
	<p>Referent</p> <p>Fire alarm call point</p>
	<p>Function</p> <p>To indicate the location of a fire alarm call point</p>
	<p>Image content</p> <p>Hand (plan view) with one finger extended, dot in square (outlined) broken at bottom, flame determinant</p>
<p>Hazard</p> <p>Not being able to locate a fire alarm call point</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a fire alarm call point</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)


	Reference No. ISO 7010-F006
	Referent Fire emergency telephone
	Function To indicate the location of a fire emergency telephone
	Image content Telephone receiver (profile), flame determinant
Hazard Not being able to locate a fire emergency telephone	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire emergency telephone	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)


	<p>Reference No.</p> <p>ISO 7010-F007</p>
	<p>Referent</p> <p>Fire protection door</p>
	<p>Function</p> <p>To indicate the location of a fire protection door</p>
	<p>Image content</p> <p>Door at angle, curved arrow, flame determinant</p>
<p>Hazard</p> <p>Not being able to locate and identify a fire protection door</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Identifying the door as a fire protection door</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)


	Reference No. ISO 7010-F008
	Referent Fixed fire extinguishing battery
	Function To indicate the location of a fixed fire extinguishing battery
	Image content Four bottles attached to a manifold, flame determinant
Hazard Not being able to locate a fixed fire extinguishing battery	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fixed fire extinguishing battery	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)


	<p>Reference No.</p> <p>ISO 7010-F009</p>
	<p>Referent</p> <p>Wheeled fire extinguisher</p>
	<p>Function</p> <p>To indicate the location of a wheeled fire extinguisher</p>
	<p>Image content</p> <p>Bottle on wheeled cart (profile), flame determinant</p>
<p>Hazard</p> <p>Not being able to locate a wheeled fire extinguisher</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a wheeled fire extinguisher</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)


	Reference No. ISO 7010-F010
	Referent Portable foam applicator unit
	Function To indicate the location of a portable foam applicator unit
	Image content Foam can with goose neck hose terminating with a venturi nozzle, flame determinant
Hazard Not being able to locate a portable foam applicator unit	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a portable foam applicator unit	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-F011</p>
	<p>Referent</p> <p style="text-align: center;">Water fog applicator</p>
	<p>Function</p> <p>To indicate the location of a water fog applicator</p>
	<p>Image content</p> <p>90° bend terminating in a nozzle with five non-parallel segmented lines, flame determinant</p>
<p>Hazard</p> <p>Not being able to locate a water fog applicator</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a water fog applicator</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)


	Reference No. ISO 7010-F012
	Referent Fixed fire extinguishing installation
	Function To indicate the location of a fixed fire extinguishing installation
	Image content Tank (profile) supported on a frame at two points, flame determinant
Hazard Not being able to locate a fixed fire extinguishing installation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fixed fire extinguishing installation	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)


	<p>Reference No.</p> <p>ISO 7010-F013</p>
	<p>Referent</p> <p>Fixed fire extinguishing bottle</p>
	<p>Function</p> <p>To indicate the location of a fixed fire extinguishing bottle</p>
	<p>Image content</p> <p>Bottle (head-on view) supported on its side on a frame at two points, flame determinant</p>
<p>Hazard</p> <p>Not being able to locate a fixed fire extinguishing bottle</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a fixed fire extinguishing bottle</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)


	Reference No. ISO 7010-F014
	Referent Remote release station
	Function To indicate the location of a remote release station
	Image content Bottle with a knob handle on top, flame determinant
Hazard Not being able to locate a remote release station	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a remote release station	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-F015</p>
	<p>Referent</p> <p style="text-align: center;">Fire monitor</p>
	<p>Function</p> <p>To indicate the location of a fire monitor</p>
	<p>Image content</p> <p>Fire monitor (profile), flame determinant</p>
<p>Hazard</p> <p>Not being able to locate a fire monitor</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Being aware of the location of a fire monitor</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)


	Reference No. ISO 7010-F016
	Referent Fire blanket
	Function To indicate the location of a fire blanket
	Image content Human figure holding a fire blanket, flame determinant
Hazard Not being able to locate a fire blanket	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Being aware of the location of a fire blanket	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 — Description and application of referent for mandatory action signs (category M)


	Reference No. ISO 7010-M001
	Referent General mandatory action sign
	Function To signify a mandatory action
	Image content Exclamation mark
Hazard Risk to people not following the mandatory action specified by the supplementary sign	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Carrying out the mandatory action specified by the supplementary sign	
Additional information This safety sign cannot be used on its own and requires a supplementary sign to give further information about the action to be taken.	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M002</p>
	Referent <p style="text-align: center;">Refer to instruction manual/booklet</p>
	Function <p>To signify that the instruction manual/booklet must be read</p>
	Image content <p>Upper human figure (right-hand profile) holding an open manual/booklet</p>
Hazard <p>Not reading the instruction manual/booklet before starting work or before operating equipment or machinery</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Reading the instruction manual/booklet before starting work or before operating equipment or machinery</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M003</p>
	<p>Referent</p> <p style="text-align: center;">Wear ear protection</p>
	<p>Function</p> <p>To signify that ear protection must be worn</p>
	<p>Image content</p> <p>Human head (front view) wearing ear protection</p>
<p>Hazard</p> <p>Noise</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Wearing ear protection</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M004
	Referent Wear eye protection
	Function To signify that eye protection must be used
	Image content Human head (front view) wearing eye protection
Hazard Flying objects/particles	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing eye protection	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

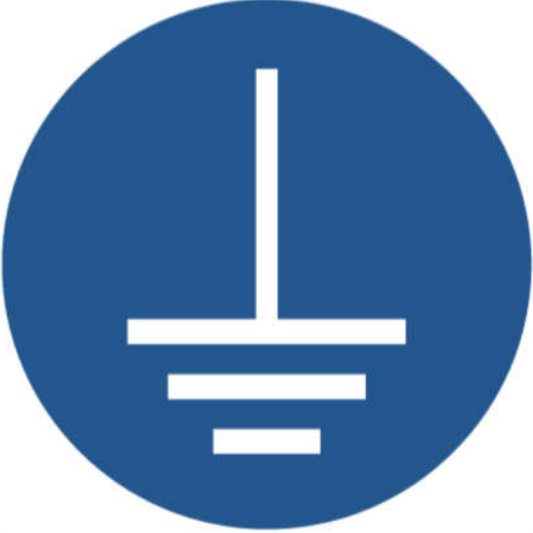
	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M005</p>
	<p>Referent</p> <p style="text-align: center;">Connect an earth terminal to the ground</p>
	<p>Function</p> <p>To signify that an earth terminal must be connected</p>
	<p>Image content</p> <p>Vertical line joining horizontal line with two progressively shorter parallel horizontal lines underneath</p>
<p>Hazard</p> <p>Electric shock, explosion, fire</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Connecting an earth terminal of a product to the ground</p>	
<p>Additional information</p> <p>This safety sign relates to products employing a class I insulating system which requires protective earthing.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

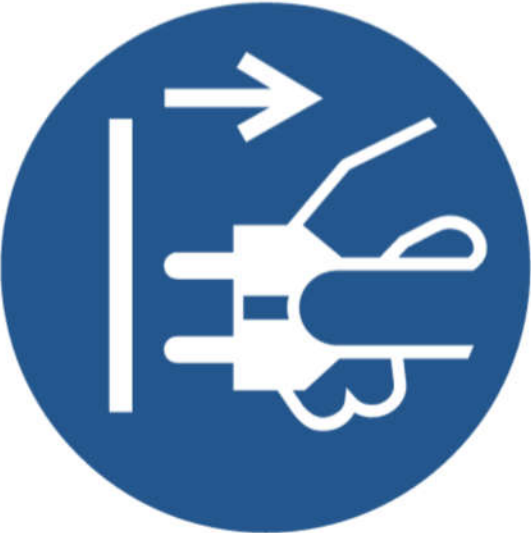
	Reference No. <p style="text-align: center;">ISO 7010-M006</p>
	Referent <p style="text-align: center;">Disconnect mains plug from electrical outlet</p>
	Function <p>To signify that the mains plug must be disconnected from electrical outlet for the purposes of maintenance of electrical equipment, in the case of malfunction or when left unattended</p>
	Image content <p>Two fingers and thumb (outlined) holding a two-pin electrical plug, arrow pointing right, vertical line</p>
Hazard <p>Electric shock, fire</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Disconnecting the mains plug for the purposes of maintenance, in the case of malfunction or when left unattended</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>If necessary, a supplementary sign shall be used to give further information on when to disconnect the mains plug from electrical outlet.</p>	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M007</p>
	<p>Referent</p> <p style="text-align: center;">Opaque eye protection must be worn</p>
	<p>Function</p> <p>To signify that opaque eye protection must be worn</p>
	<p>Image content</p> <p>Human head (front view) wearing opaque eye protection</p>
<p>Hazard</p> <p>Visible or invisible rays</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Ensuring that people undergoing treatment with visible or invisible rays are wearing opaque eye protection</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M008</p>
	Referent <p style="text-align: center;">Wear safety footwear</p>
	Function To signify that safety footwear must be worn
	Image content Two safety boots, one shown in front, the other shown behind (outlined)
Hazard Feet striking or being struck by objects or being in contact with thermal or chemical materials	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing safety footwear	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M009</p>
	<p>Referent</p> <p style="text-align: center;">Wear protective gloves</p>
	<p>Function</p> <p>To signify that protective gloves must be worn</p>
	<p>Image content</p> <p>Two protective gloves, one shown in front, the other shown behind (outlined)</p>
<p>Hazard</p> <p>Hands striking or being struck by objects or being in contact with thermal or chemical materials</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Wearing protective gloves</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M010</p>
	Referent <p style="text-align: center;">Wear protective clothing</p>
	Function <p>To signify that protective clothing must be worn</p>
	Image content <p>Overall (front view)</p>
Hazard <p>Chemicals, heat or cold</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Wearing protective clothing</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M011</p>
	<p>Referent</p> <p style="text-align: center;">Wash your hands</p>
	<p>Function</p> <p>To signify that hands must be washed</p>
	<p>Image content</p> <p>Two hands, one shown in front, the other shown behind (outlined), three lines of four dots, tap</p>
<p>Hazard</p> <p>Infection or contamination</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Washing hands before starting work task and after finishing work task</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M012
	Referent Use handrail
	Function To signify that the handrail must be used
	Image content Upper human figure (left-hand profile) with left arm touching diagonal line
Hazard Falling, slipping or tripping	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Holding the handrail when using stairs, escalators or moving walkways	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M013</p>
	<p>Referent</p> <p style="text-align: center;">Wear a face shield</p>
	<p>Function</p> <p>To signify that a face shield must be worn</p>
	<p>Image content</p> <p>Human head (left-hand profile, outlined) wearing a face shield</p>
<p>Hazard</p> <p>Flying objects/particles</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Wearing a face shield</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M014
	Referent Wear head protection
	Function To signify that head protection must be worn
	Image content Human head (left-hand profile, outlined) wearing head protection
Hazard Objects falling on head or head striking objects	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing head protection	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M015</p>
	<p>Referent</p> <p style="text-align: center;">Wear high-visibility clothing</p>
	<p>Function</p> <p>To signify that high-visibility clothing must be worn</p>
	<p>Image content</p> <p>Sleeveless jacket (front view) with two vertical and two horizontal lines</p>
<p>Hazard</p> <p>Moving vehicles or equipment</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Wearing high-visibility clothing</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M016
	Referent Wear a mask
	Function To signify that a face mask must be worn
	Image content Human head (left-hand profile, outlined) wearing a mask
Hazard Particulates in the air	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing a face mask	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M017</p>
	<p>Referent</p> <p style="text-align: center;">Wear respiratory protection</p>
	<p>Function</p> <p>To signify that respiratory protection must be worn</p>
	<p>Image content</p> <p>Human head (front view, outlined) wearing respiratory protection</p>
<p>Hazard</p> <p>Harmful substances (e.g. noxious gases)</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Wearing respiratory protection</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M018</p>
	Referent <p style="text-align: center;">Wear a safety harness</p>
	Function <p>To signify that a safety harness must be worn</p>
	Image content <p>Human figure (outlined) wearing a safety harness</p>
Hazard <p>Falling from a height</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Wearing a safety harness</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	<p>Reference No.</p> <p>ISO 7010-M019</p>
	<p>Referent</p> <p>Wear a welding mask</p>
	<p>Function</p> <p>To signify that a welding mask must be worn</p>
	<p>Image content</p> <p>Human head (left-hand profile, outlined) wearing a welding mask</p>
<p>Hazard</p> <p>Hot flying particles, intense light and UV radiation from welding activity</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Wearing a welding mask</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)

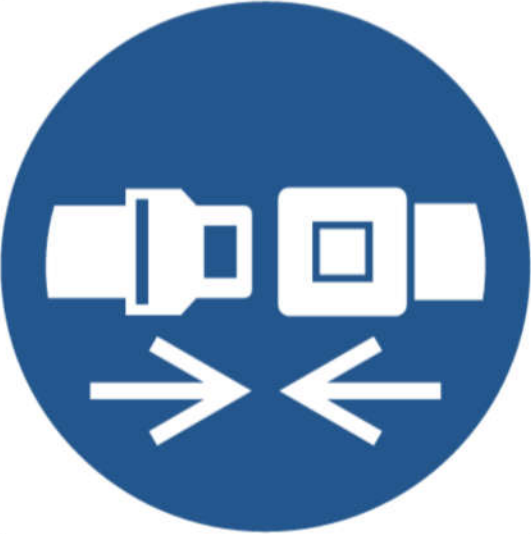
	Reference No. ISO 7010-M020
	Referent Wear safety belts
	Function To signify that safety belts must be used
	Image content End of belts with a buckle and two arrows pointing to each other
Hazard Being projected from the seat of a vehicle or equipment	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing safety belts	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M021</p>
	<p>Referent</p> <p style="text-align: center;">Disconnect before carrying out maintenance or repair</p>
	<p>Function</p> <p>To signify that the machine or the equipment, which is not connected to mains by a plug, has to be disconnected from all sources of power before carrying out maintenance or repair</p>
	<p>Image content</p> <p>Horizontal arrow pointing to the right; one vertical short thick line attached to a circle at the bottom with a longer thick line at an angle to the right attached to the top of the circle; a further thick line in the same plane as the lower one, separated from the line at an angle</p>
<p>Hazard</p> <p>Machine or equipment running during maintenance or repair</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Disconnecting the machine or equipment before carrying out maintenance or repair</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M022
	Referent Use barrier cream
	Function To signify that the skin has to be protected with an appropriate barrier cream
	Image content Human hand, tube, wavy line
Hazard Damage to the skin	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Protecting the skin with barrier cream before starting work or putting on gloves	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M023</p>
	<p>Referent</p> <p style="text-align: center;">Use footbridge</p>
	<p>Function</p> <p>To signify that a footbridge must be used</p>
	<p>Image content</p> <p>Human figure walking on a footbridge</p>
<p>Hazard</p> <p>Moving vehicles, obstructions, or tripping or falling</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Using the footbridge to avoid dangerous areas</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M024</p>
	Referent <p style="text-align: center;">Use this walkway</p>
	Function <p>To signify that pedestrians must use a designated walkway</p>
	Image content <p>Human figure walking (left hand)</p>
<p>Hazard Areas unsafe for pedestrians</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Pedestrians using the designated walkway</p> <p>Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M025</p>
	<p>Referent</p> <p style="text-align: center;">Protect infant's eyes with opaque eye protection</p>
	<p>Function</p> <p>To signify that opaque eye protection must be worn by an infant</p>
	<p>Image content</p> <p>Infant (outlined) wearing opaque eye protection</p>
<p>Hazard</p> <p>Intense light incident on an infant's eyes</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Ensuring that the infant's eyes are protected before switching the equipment on or before placing the infant into the radiated area</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M026</p>
	Referent <p style="text-align: center;">Use protective apron</p>
	Function <p>To signify that the front of the body must be protected by an apron</p>
	Image content <p>Human figure (outlined) with an apron</p>
Hazard <p>Front of body striking or being struck by objects or coming into contact with substances or materials</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Protecting the front of the body</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M027</p>
	<p>Referent</p> <p style="text-align: center;">Check guard</p>
	<p>Function</p> <p>To signify that checks must be conducted to ensure that guards are in place or used</p>
	<p>Image content</p> <p>Series of horizontal and vertical lines and two interlocking illustrations of cog wheels</p>
<p>Hazard</p> <p>Moving machinery</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Ensuring that guards are in place before operating the machinery</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M028</p>
	Referent <p style="text-align: center;">Keep locked</p>
	Function <p>To signify that a cabinet or facility must be kept locked</p>
	Image content <p>Padlock with keyhole and four complete chain links and two pieces</p>
Hazard <p>Access to harmful substances or equipment</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Ensuring that cabinets or facilities containing harmful substances or equipment are kept locked</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M029</p>
	<p>Referent</p> <p style="text-align: center;">Sound horn</p>
	<p>Function</p> <p>To signify that a horn must be sounded</p>
	<p>Image content</p> <p>Horn, three curved lines</p>
<p>Hazard</p> <p>Collision with another vehicle or with people</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Equipment operator or driver sounding horn</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M030
	Referent Use litter bin
	Function To signify that litter must be placed in a litter bin
	Image content Human figure, bin/container and four diamond shapes
Hazard Material which is harmful or could create a tripping or slipping hazard	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Putting litter in a bin or container	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary sign shall be used to specify the kind of litter to be placed in the litter bin.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M031</p>
	<p>Referent</p> <p style="text-align: center;">Use table saw adjustable guard</p>
	<p>Function</p> <p>To signify that the adjustable guard must be used</p>
	<p>Image content</p> <p>Semicircular saw blade with semicircular cover, curved arrow pointing downwards, single line and block shape</p>
<p>Hazard</p> <p>Circular saw</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Ensuring that the saw is guarded</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M032
	Referent Wear anti-static footwear
	Function To signify that anti-static footwear must be worn
	Image content End of leg, shoe with lightning bolt on sole
Hazard Creation of static electricity that can cause sparks leading to fire and explosions	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Wearing anti-static footwear	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M033</p>
	<p>Referent</p> <p style="text-align: center;">Close safety bar of chairlift</p>
	<p>Function</p> <p>To signify that the safety bar of the chairlift must be closed</p>
	<p>Image content</p> <p>Human figure (right-hand profile) sitting in chairlift with safety bar up, curved arrow pointing downwards</p>
<p>Hazard</p> <p>Safety bar closed too late</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Closing the safety bar of a chairlift</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M034</p>
	Referent <p style="text-align: center;">Open safety bar of chairlift</p>
	Function <p>To signify that the safety bar of the chairlift must be opened</p>
	Image content <p>Human figure (right-hand profile) sitting in chairlift with safety bar down, curved arrow pointing upwards</p>
Hazard <p>Safety bar opened too early</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Opening the safety bar of a chairlift</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M035</p>
	<p>Referent</p> <p style="text-align: center;">Immediately leave the tow-track in the event of falling</p>
	<p>Function</p> <p>To signify that the tow-track must be left immediately in the event of falling</p>
	<p>Image content</p> <p>Human figure on skis, two parallel straight lines, arrow pointing to the right</p>
<p>Hazard</p> <p>Obstruction on the tow-track</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Leaving the tow-track after falling</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M036</p>
	Referent <p style="text-align: center;">Lift ski tips</p>
	Function To signify that ski tips must be lifted
	Image content Human figure (right-hand profile) with skis sitting in chairlift, arrow pointing upwards
Hazard Crashing of the ski tips into technical parts of the cableway	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Lifting the ski tips	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M037</p>
	<p>Referent</p> <p>Close and secure hatches in launch sequence</p>
	<p>Function</p> <p>To signify that hatches on a lifeboat, fully enclosed rescue boat or rigid liferaft must be closed and secured in launch sequence</p>
	<p>Image content</p> <p>Hand around a hatch handle with arrow pointing to the right above curved arrow pointing in clockwise direction</p>
<p>Hazard</p> <p>Uncontrolled flooding, exposure to a hazardous atmosphere, loss of breathable air from the self-contained air support system, fire and smoke</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Closing and securing hatches at the appropriate time</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M038</p>
	Referent <p style="text-align: center;">Start engine in launch sequence</p>
	Function <p>To signify that the engine of a lifeboat or rescue boat must be started in launch sequence</p>
	Image content <p>Handcrank and curved arrow pointing in clockwise direction</p>
Hazard <p>No propulsion at the time of need or the engine is started too early in the sequence to launch</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Starting the engine at the appropriate time</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

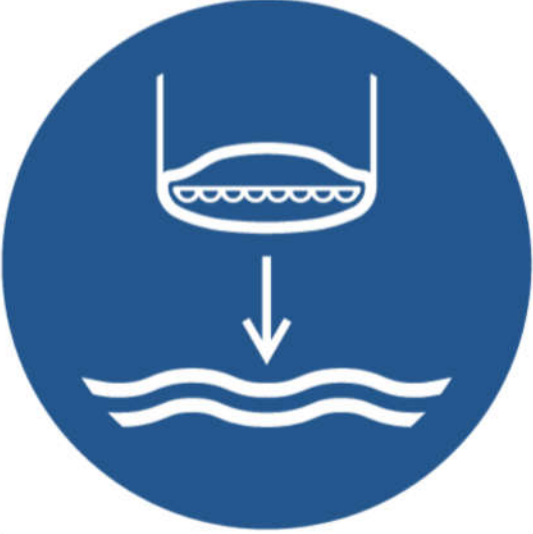
	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M039</p>
	<p>Referent</p> <p style="text-align: center;">Lower lifeboat to the water in launch sequence</p>
	<p>Function</p> <p>To signify that the lifeboat must be lowered in launch sequence</p>
	<p>Image content</p> <p>Lifeboat on two falls, arrow pointing down, two wavy lines</p>
<p>Hazard</p> <p>Lifeboat is not lowered to the water at the appropriate time</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Lowering the lifeboat at the appropriate time</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M040
	Referent Lower liferaft to the water in launch sequence
	Function To signify that the liferaft must be lowered in launch sequence
	Image content Liferaft on single fall, arrow pointing down, two wavy lines
Hazard Liferaft is not lowered to the water at the appropriate time	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Lowering the liferaft at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M041</p>
	<p>Referent</p> <p style="text-align: center;">Lower rescue boat to the water in launch sequence</p>
	<p>Function</p> <p>To signify that the rescue boat must be lowered in launch sequence</p>
	<p>Image content</p> <p>Boat on two falls, two upper human figures, one of them outlined, arrow pointing down, two wavy lines</p>
<p>Hazard</p> <p>Rescue boat is not lowered to the water at the appropriate time</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Lowering the rescue boat at the appropriate time</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M042
	Referent Release falls in launch sequence
	Function To signify that the lifeboat or rescue boat falls must be released in launch sequence
	Image content Hook on pivot attached to two sloping lines, curved arrow pointing in anticlockwise direction from a U-shape
Hazard Lifeboat or rescue boat release hook is not released from the fall or falls at the appropriate time	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Releasing falls at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M043</p>
	<p>Referent</p> <p style="text-align: center;">Start water spray in launch sequence</p>
	<p>Function</p> <p>To signify that the water spray system for a lifeboat must be energized in launch sequence</p>
	<p>Image content</p> <p>Nozzle and dotted lines above lifeboat</p>
<p>Hazard</p> <p>Fire on or near the water surface or hazardous cargo release that may contaminate the outer surface of the boat</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Energizing the water spray system at the appropriate time</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M044
	Referent Start air supply in launch sequence
	Function To signify that the self-contained air support system must be energized in launch sequence
	Image content Bellows with three arrows at the nozzle pointing away in a radial pattern
Hazard Fire and/or hazardous atmosphere that consumes oxygen necessary to sustain life inside the lifeboat and provide combustion air for the diesel propulsion engine of the lifeboat	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Energizing the self-contained air support system at the appropriate time	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M045</p>
	<p>Referent</p> <p style="text-align: center;">Release lifeboat gripes in launch sequence</p>
	<p>Function</p> <p>To signify that the lifeboat gripes must be released in launch sequence</p>
	<p>Image content</p> <p>Lifeboat suspended on a fall in a davit with a gripe surrounding the boat; arrow pointing at the release point of the gripe</p>
<p>Hazard</p> <p>Lifeboat remains secured to the cradle and davit and cannot be lowered</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Releasing the gripes of a lifeboat at the appropriate time</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M046
	Referent Secure gas cylinders
	Function To signify that gas cylinders must be secured
	Image content Upper part of gas cylinder, chain
Hazard Falling gas cylinder causing crush, explosion or release of gas	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Securing gas cylinders	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M047</p>
	<p>Referent</p> <p style="text-align: center;">Use self-contained breathing appliance</p>
	<p>Function</p> <p>To signify that a self-contained breathing appliance must be used</p>
	<p>Image content</p> <p>Upper human figure (left-hand profile, outlined) wearing a compressed air cylinder and mask connected by a tube</p>
<p>Hazard</p> <p>Harmful gases and lack of oxygen</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Using a self-contained breathing appliance</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M048
	Referent Use gas detector
	Function To signify that a gas detector must be used
	Image content Front of a block with a small cylinder on top and on the front plane a curved scale with markers and pointer; three curved arrows; three lines with several curves
Hazard Hazardous gases or vapours, explosive atmosphere	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Using a gas detector	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M049</p>
	<p>Referent</p> <p style="text-align: center;">Wear protective roller sport equipment</p>
	<p>Function</p> <p>To signify that protective roller sport equipment must be worn</p>
	<p>Image content</p> <p>Human figure (outlined) wearing head, wrist, palm, knee and elbow protectors</p>
<p>Hazard</p> <p>Unprotected body and limb impacts with surfaces and obstacles</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Wearing protective roller sport equipment when doing roller sport</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M050
	Referent Alighting from toboggan to the left
	Function To signify that the user must alight from toboggan to the left
	Image content Toboggan user alighting from a toboggan to the left, horizontal line underneath, arrow pointing to the left
Hazard Hazards that do not allow alighting safely other than to the left-hand side	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Alighting from toboggan to the left	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M051</p>
	<p>Referent</p> <p style="text-align: center;">Alighting from toboggan to the right</p>
	<p>Function</p> <p>To signify that the user must alight from toboggan to the right</p>
	<p>Image content</p> <p>Toboggan user alighting from a toboggan to the right, horizontal line underneath, arrow pointing to the right</p>
<p>Hazard</p> <p>Hazards that do not allow alighting safely other than to the right-hand side</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Alighting from toboggan to the right</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)


	Reference No. ISO 7010-M052
	Referent Keep distance between toboggans
	Function To signify that a distance must be kept between toboggans
	Image content Two seated human figures (left-hand profile), two toboggans above a sloping line, double-ended arrow between the toboggans
Hazard Toboggan colliding with other toboggans	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Ensuring enough space between toboggans to allow toboggans to stop in dangerous situations and prevent collisions	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-M053</p>
	<p>Referent</p> <p style="text-align: center;">Wear personal flotation device</p>
	<p>Function</p> <p>To signify that a personal flotation device (lifejacket) must be worn</p>
	<p>Image content</p> <p>Human figure (outlined) wearing personal flotation device (lifejacket)</p>
<p>Hazard</p> <p>Not using a personal flotation device can result in a person drowning</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Wearing personal flotation device (lifejacket)</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-M054</p>
	Referent <p style="text-align: center;">Keep children under supervision in the aquatic environment</p>
	Function <p>To signify that children must be kept under supervision in the aquatic environment</p>
	Image content <p>Upper part of large human figure, upper part of small human figure with raised arm, arrow, two wavy lines</p>
Hazard <p>Children being in water where they could get into difficulties</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Adults supervising children playing in water or swimming</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 — Description and application of referent for prohibition signs (category P)


	Reference No. <p style="text-align: center;">ISO 7010-P001</p>
	Referent <p style="text-align: center;">General prohibition sign</p>
	Function To signify a prohibited action
	Image content None
<p>Hazard Risk to people specified by the supplementary sign</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Not doing an action specified by the supplementary sign</p> <p>Additional information This safety sign cannot be used on its own and requires a supplementary sign to give further information about the action which is prohibited.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P002
	Referent No smoking
	Function To prohibit smoking
	Image content Cigarette (profile, outlined) with two wavy lines
Hazard Fire or explosion caused by lit cigarettes or other smoking materials or harm from the smoke	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not smoking	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P003</p>
	<p>Referent</p> <p style="text-align: center;">No open flame; Fire, open ignition source and smoking prohibited</p>
	<p>Function</p> <p>To prohibit smoking and all forms of open flame</p>
	<p>Image content</p> <p>Match (profile, outlined), flame</p>
<p>Hazard</p> <p>Fire or explosion caused by an open flame, open ignition source or smoking</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not having an open flame or open ignition source and not smoking</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P004</p>
	Referent <p style="text-align: center;">No thoroughfare</p>
	Function To prohibit the use of a thoroughfare by pedestrians
	Image content Human figure walking (left hand)
Hazard Collision with vehicles or machinery	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using the thoroughfare	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	Reference No. ISO 7010-P005
	Referent Not drinking water
	Function To prohibit drinking of unsuitable water
	Image content Tap above glass, two wavy lines
Hazard Water unsuitable for drinking	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not drinking the water	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	Reference No. ISO 7010-P006
	Referent No access for forklift trucks and other industrial vehicles
	Function To prohibit the use of forklift trucks and other industrial vehicles
	Image content Forklift truck (left-hand profile) with human figure
Hazard Moving forklift trucks and other industrial vehicles	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using forklift trucks and other industrial vehicles	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P007</p>
	<p>Referent</p> <p style="text-align: center;">No access for people with active implanted cardiac devices</p>
	<p>Function</p> <p>To prohibit people with active implanted cardiac devices from entering a designated area</p>
	<p>Image content</p> <p>Heart shape and representation of pulse generator connected by curved line</p>
<p>Hazard</p> <p>Interference to the operation of or damage to active implanted cardiac devices from equipment generating strong electromagnetic fields</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>People with active implanted cardiac devices not entering a designated area</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P008
	Referent No metallic articles or watches
	Function To prohibit metallic articles or watches
	Image content Face and part of strap of an analogue wristwatch, flat side of a key
Hazard Strong magnetic fields	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Removing or not wearing metallic articles or watches	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P009</p>
	<p>Referent</p> <p style="text-align: center;">No climbing</p>
	<p>Function</p> <p>To prohibit climbing</p>
	<p>Image content</p> <p>Human figure (rear view), six horizontal lines between two parallel vertical lines</p>
<p>Hazard</p> <p>Object unsafe to climb on and hazardous location/area</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not climbing</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P010
	Referent Do not touch
	Function To prohibit touching objects/parts of an object
	Image content Hand, horizontal line underneath
Hazard Dangerous surfaces	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not touching objects or parts of an object	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P011</p>
	<p>Referent</p> <p style="text-align: center;">Do not extinguish with water</p>
	<p>Function</p> <p>To prohibit using water to extinguish a fire</p>
	<p>Image content</p> <p>Bucket, area outlined by wavy line, flame</p>
<p>Hazard</p> <p>Dangerous reaction from the application of water to a burning substance</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not using water to extinguish a fire</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P012</p>
	Referent <p style="text-align: center;">No heavy load</p>
	Function To prohibit the placing of heavy objects on a surface
	Image content Weight resting on the two parts of a line which is broken in the centre so that the two halves are separated and each inclines downward
Hazard Breakage due to heavy load	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not placing any heavy objects on a surface	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. In spite of this, the following needs to be considered: <p style="padding-left: 40px;">"Heavy" depends on the context of use and if it needs to be specified, a supplementary sign should be added stating the maximum permissible load, for example as follows: max. 100 kg.</p>	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P013</p>
	<p>Referent</p> <p style="text-align: center;">No activated mobile phone</p>
	<p>Function</p> <p>To prohibit activated mobile phones</p>
	<p>Image content</p> <p>Mobile phone (front view), six curved lines</p>
<p>Hazard</p> <p>Electromagnetic field</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Turning the mobile phone off or not switching it on</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P014</p>
	Referent <p style="text-align: center;">No access for people with metallic implants</p>
	Function <p>To prohibit access of people with metallic implants</p>
	Image content <p>Hip joint and socket (outlined) joined by a black hip implant</p>
Hazard <p>Invisible rays causing a rise in temperature of a metallic implant</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>People with metallic implants not entering a designated area</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	Reference No. <p style="text-align: center;">ISO 7010-P015</p>
	Referent <p style="text-align: center;">No reaching in</p>
	Function <p>To prohibit people putting hands into openings</p>
	Image content <p>Hand between two converging lines</p>
Hazard <p>Injury to hands</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Not putting hands into designated openings</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P016
	Referent Do not spray with water
	Function To prohibit spraying
	Image content Water hose with nozzle, five divergent lines of dots
Hazard Electric shock, chemical reaction, fire	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not spraying with water on machines and equipment or areas where chemical reactions can occur	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<p>Reference No.</p> <p>ISO 7010-P017</p>
	<p>Referent</p> <p>No pushing</p>
	<p>Function</p> <p>To prohibit pushing against an object</p>
	<p>Image content</p> <p>Horizontal line and vertical block with human figure (right-hand profile) pushing against it</p>
<p>Hazard</p> <p>Objects overbalancing and falling</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not pushing an object</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P018</p>
	Referent <p style="text-align: center;">No sitting</p>
	Function To prohibit sitting on a surface
	Image content Human figure (left-hand profile) in sitting position, horizontal line
Hazard Surface unsuitable to sit on	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not sitting on an unsuitable surface	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P019</p>
	<p>Referent</p> <p style="text-align: center;">No stepping on surface</p>
	<p>Function</p> <p>To prohibit stepping onto a surface</p>
	<p>Image content</p> <p>Human figure stepping up, line with right angle</p>
<p>Hazard</p> <p>Surface unsuitable for stepping onto</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not stepping onto an unsuitable surface</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P020</p>
	Referent <p style="text-align: center;">Do not use lift in the event of fire</p>
	Function <p>To prohibit use of lift in the event of fire</p>
	Image content <p>Outline of lift with two human figures standing inside and flames at the right-hand side of the lift</p>
Hazard <p>Being trapped in a lift during a fire</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Not using lift in the event of fire</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	Reference No. <p style="text-align: center;">ISO 7010-P021</p>
	Referent <p style="text-align: center;">No dogs</p>
	Function To prohibit taking dogs into designated areas
	Image content Dog (right-hand profile)
Hazard Infections due to dogs; harming of people caused by dog bites	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not taking dogs into a designated area	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. ISO 7010-P022
	Referent No eating or drinking
	Function To prohibit eating and drinking
	Image content Three horizontal lines alongside a cup with straw
Hazard Ingestion of dangerous substances by food and drink contaminated at a designated area	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not eating or drinking in the designated area	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

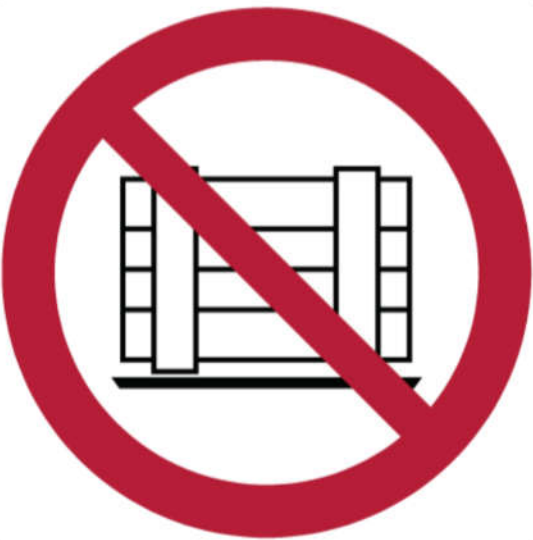
	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P023</p>
	<p>Referent</p> <p style="text-align: center;">Do not obstruct</p>
	<p>Function</p> <p>To prohibit the obstruction of a designated clear area</p>
	<p>Image content</p> <p>Crate (outlined), horizontal line underneath</p>
<p>Hazard</p> <p>Obstruction in a designated clear area</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not placing an obstruction in a designated clear area (e.g. escape routes, emergency exits, passageways)</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P024
	Referent Do not walk or stand here
	Function To prohibit walking or standing on a designated area
	Image content Two footprints
Hazard Areas which are unsafe for people to walk or stand on	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Keeping off a designated area	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P025</p>
	<p>Referent</p> <p style="text-align: center;">Do not use this incomplete scaffold</p>
	<p>Function</p> <p>To prohibit the use of scaffolding systems which are not complete</p>
	<p>Image content</p> <p>Human figure (right-hand profile) walking on a broken horizontal bar surrounded by vertical and horizontal lines</p>
<p>Hazard</p> <p>Incomplete scaffold</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not using an incomplete scaffold</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P026
	Referent Do not use this device in a bathtub, shower or water-filled reservoir
	Function To prohibit the use of unsuitable electrical equipment in or near water
	Image content Shower and bathtub
Hazard Electric shock	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using electrically powered equipment in bathtubs, showers or water-filled reservoirs	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P027</p>
	<p>Referent</p> <p style="text-align: center;">Do not use this lift for people</p>
	<p>Function</p> <p>To prohibit the use of the lift for the transportation of people</p>
	<p>Image content</p> <p>Human figure (front view) in a rectangle, short arrows above and underneath the rectangle</p>
<p>Hazard</p> <p>Goods or freight lifts without the safety features necessary for the transportation of people</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not using the lift for the transportation of people</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P028</p>
	Referent <p style="text-align: center;">Do not wear gloves</p>
	Function <p>To prohibit the use of gloves when operating a machine with drawing-in hazard</p>
	Image content <p>Two gloves, one outlined, one filled</p>
<p>Hazard Drawing-in hazard to people wearing gloves while operating a machine</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Operating a machine with drawing-in hazard without wearing gloves</p> <p>Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	Reference No. <p style="text-align: center;">ISO 7010-P029</p>
	Referent <p style="text-align: center;">No photography</p>
	Function To prohibit the taking of photographs
	Image content Camera
Hazard Distraction of drivers, operatives and people working, particularly in dark environments	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not taking photographs	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)


	Reference No. ISO 7010-P030
	Referent Do not tie knots in rope
	Function To prohibit tying knots in a climbing rope
	Image content Climbing rope with a knot
Hazard Knots in a climbing rope	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not tying any knots in a climbing rope	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P031</p>
	<p>Referent</p> <p style="text-align: center;">Do not alter the state of the switch</p>
	<p>Function</p> <p>To prohibit any change of the current energetic or mechanical state of a machine or equipment</p>
	<p>Image content</p> <p>Switch and two arrows</p>
<p>Hazard</p> <p>Change of the current energetic or mechanical state of a machine or equipment</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not switching</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P032</p>
	Referent <p style="text-align: center;">Do not use for face grinding</p>
	Function <p>To prohibit the use of the grinding disc for face grinding</p>
	Image content <p>Horizontal line with two thicknesses and an angled step; grinding machine at an angle to the line</p>
Hazard <p>Breakage of grinding disc due to overstressing leading to flying objects</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Not using the grinding disc for face grinding</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P033</p>
	<p>Referent</p> <p style="text-align: center;">Do not use for wet grinding</p>
	<p>Function</p> <p>To prohibit the use of the grinding disc for wet grinding</p>
	<p>Image content</p> <p>Horizontal line, two circles with random infilling of dots and outer circle touching line, tap with water drops</p>
<p>Hazard</p> <p>Breakage of grinding disc due to overstressing leading to flying objects</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not using the grinding disc for wet grinding</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P034
	Referent Do not use with hand-held grinding machine
	Function To prohibit the use of the grinding disc with a hand-held grinding machine
	Image content Hand holding a grinding machine
Hazard Breakage of grinding disc due to overstressing leading to flying objects	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using the grinding disc with a hand-held grinding machine	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P035</p>
	<p>Referent</p> <p style="text-align: center;">Do not wear metal-studded footwear</p>
	<p>Function</p> <p>To prohibit the use of metal-studded footwear</p>
	<p>Image content</p> <p>End of leg, shoe with circles on sole</p>
<p>Hazard</p> <p>Lack of grip between metal-studded footwear and certain floor surface</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not wearing metal-studded footwear</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P036
	Referent No children allowed
	Function To prohibit children from entering a dangerous area
	Image content Small boy and larger girl
Hazard Areas dangerous to children	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Children not entering a dangerous area	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P037</p>
	<p>Referent</p> <p style="text-align: center;">Do not leave the tow-track</p>
	<p>Function</p> <p>To prohibit leaving the tow-track</p>
	<p>Image content</p> <p>Two parallel curved dashed lines running across two straight outlined tracks</p>
<p>Hazard</p> <p>Uneven surface and line supporting structure outside the tow-track, following users of the tow-track</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not leaving the tow-track</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P038
	Referent Do not swing the chair
	Function To prohibit swinging the chair
	Image content Two human figures (right-hand profile) sitting in two chairs, line above, curved arrow with two arrow heads
Hazard Chair falling down	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not swinging the chair	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P039</p>
	<p>Referent</p> <p style="text-align: center;">Hot works prohibited</p>
	<p>Function</p> <p>To prohibit hot works</p>
	<p>Image content</p> <p>Hand (outlined) holding a tool, four lines of different lengths, each with a star at the end, fifth star, three parallel wavy lines</p>
<p>Hazard</p> <p>Fire, explosion</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not doing hot works</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P040
	Referent Do not set off fireworks
	Function To prohibit setting off fireworks
	Image content Fireworks, sparks
Hazard Fire or explosion caused by setting off fireworks	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not setting off fireworks	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P041</p>
	Referent <p style="text-align: center;">No leaning against</p>
	Function To prohibit leaning against an object
	Image content Human figure (left-hand profile) leaning backwards against a vertical line
Hazard Object overbalancing and falling or person breaking through	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not leaning against an object	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	Reference No. <p style="text-align: center;">ISO 7010-P042</p>
	Referent <p style="text-align: center;">Not for pregnant women</p>
	Function To prohibit pregnant women undertaking hazardous actions or activities
	Image content Standing pregnant female figure (right-hand profile)
Hazard Injury to the expectant mother or baby due to their lower tolerability to a particular situation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not undertaking hazardous actions or activities	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. The graphical symbol is the mirrored (and slightly adapted) standardized and registered public information symbol ISO 7001-PI PF 059 "Priority access for expecting mothers".	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P043</p>
	<p>Referent</p> <p style="text-align: center;">Not for people in the state of intoxication</p>
	<p>Function</p> <p>To prohibit intoxicated people undertaking hazardous actions or activities</p>
	<p>Image content</p> <p>Unbalanced human figure with a bottle in hand, whirls and bubbles around the figure's head</p>
<p>Hazard</p> <p>Injury to people in the state of intoxication due to their lower tolerability to a particular situation</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not undertaking hazardous actions or activities when in the state of intoxication</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P044</p>
	Referent <p style="text-align: center;">Use of smart glasses prohibited</p>
	Function <p>To prohibit using smart glasses</p>
	Image content <p>Conventional glasses (front perspective view) with a device for visual and multimedia data processing</p>
Hazard <p>Restricting people's field of view at work; distraction of drivers; mental stress/strain by unauthorized invasion of privacy</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Not using smart glasses</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P046</p>
	<p>Referent</p> <p style="text-align: center;">Do not stretch out of toboggan</p>
	<p>Function</p> <p>To prohibit stretching out of the toboggan</p>
	<p>Image content</p> <p>Seated human figure with both arms and legs outstretched, toboggan above horizontal line</p>
<p>Hazard</p> <p>Bumping or falling out caused by stretching out of the toboggan</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not stretching out of the toboggan</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P047
	Referent Do not ram into toboggans
	Function To prohibit ramming other toboggans
	Image content Two seated human figures (left-hand profile), two toboggans above sloping line, lines radiating from a point between the two toboggans
Hazard Toboggan colliding with other toboggans	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not ramming into toboggans	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P048</p>
	<p>Referent</p> <p style="text-align: center;">No running</p>
	<p>Function</p> <p>To prohibit running</p>
	<p>Image content</p> <p>Human figure (left-hand profile) running</p>
<p>Hazard</p> <p>Falling or colliding caused by running</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>No running</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P049
	Referent No swimming
	Function To prohibit swimming
	Image content Human figure swimming, two wavy lines
Hazard Water conditions or environment hazardous to swimmers	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No swimming	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P050</p>
	<p>Referent</p> <p style="text-align: center;">No snorkelling</p>
	<p>Function</p> <p>To prohibit the use of snorkelling equipment</p>
	<p>Image content</p> <p>Human figure with snorkelling equipment, single wavy line</p>
<p>Hazard</p> <p>Snorkellers and their equipment being in an area where they could collide with other people or craft in the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>No snorkelling</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P051</p>
	Referent <p style="text-align: center;">No sub-aqua diving</p>
	Function To prohibit the use of sub-aqua equipment
	Image content Human figure with sub-aqua equipment, three dots, single wavy line
Hazard Sub-aqua divers and their equipment being in an area where they could collide with other people or craft in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No sub-aqua diving	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P052</p>
	Referent <p style="text-align: center;">No diving</p>
	Function <p>To prohibit diving into the water</p>
	Image content <p>Human figure diving, two wavy lines</p>
Hazard <p>Divers being in an area where they could collide with other people or encounter other hazards in the water</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>No diving</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P053
	Referent No sailing
	Function To prohibit sailing
	Image content Sailing boat, two wavy lines
Hazard Sailing boats being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No sailing	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P054</p>
	<p>Referent</p> <p style="text-align: center;">No windsurfing</p>
	<p>Function</p> <p>To prohibit windsurfing</p>
	<p>Image content</p> <p>Human figure (left-hand profile), windsurfing board, two wavy lines</p>
<p>Hazard</p> <p>Windsurfing boards being in an area where they could collide with people in the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>No windsurfing</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P055
	Referent No manually powered craft
	Function To prohibit the use of manually powered craft (e.g. rowing, sculling, paddling, punting, pedalo)
	Image content Human figure (right-hand profile) sitting in rowing boat, oar, two wavy lines
Hazard Manually powered craft being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using manually powered craft	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P056</p>
	<p>Referent</p> <p style="text-align: center;">No mechanically powered craft</p>
	<p>Function</p> <p>To prohibit the use of mechanically powered craft</p>
	<p>Image content</p> <p>Mechanically powered craft, two wavy lines</p>
<p>Hazard</p> <p>Mechanically powered craft being in an area where they could collide with people in the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not using mechanically powered craft</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P057
	Referent No personal water craft
	Function To prohibit the use of personal water craft (e.g. jet-ski)
	Image content Human figure (left-hand profile), personal water craft, two wavy lines
Hazard Personal water craft being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using personal water craft	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P058</p>
	<p>Referent</p> <p style="text-align: center;">No towed water activity</p>
	<p>Function</p> <p>To prohibit towed water activity (e.g. water skiing, wakeboarding, doughnuts, banana craft)</p>
	<p>Image content</p> <p>Human figure (left-hand profile), water skis, tow rope, two wavy lines</p>
<p>Hazard</p> <p>Water skis, wakeboards, doughnuts, banana craft or tow ropes being in an area where they could collide with people in the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not carrying out towed water activity</p>	
<p>Additional information</p> <p>The tow rope needs to extend into the exclusion zone (as specified in ISO 3864-3) in order to convey clearly the image of a continuous tow rope extending outside the visual scene portrayed.</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-P059</p>
	Referent <p style="text-align: center;">No surf craft</p>
	Function To prohibit the use of surf craft (e.g. surfboards, surf skis, surf kayaks)
	Image content Human figure (right-hand profile), surfboard, two wavy lines, three curved lines
Hazard Surf craft being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Not using surf craft	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P060</p>
	<p>Referent</p> <p style="text-align: center;">No outdoor footwear</p>
	<p>Function</p> <p>To prohibit the wearing of outdoor footwear</p>
	<p>Image content</p> <p>Outdoor footwear</p>
<p>Hazard</p> <p>Slipping or falling or the spreading of contamination caused by the wearing of inappropriate footwear for the surface being walked upon</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not wearing outdoor footwear or ensuring that footwear is protected by overshoes</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P061
	Referent No jumping into water
	Function To prohibit jumping into the water
	Image content Human figure with arms raised, jumping, filled segment, two wavy lines
Hazard Being struck by person jumping into the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No jumping into the water	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p>ISO 7010-P062</p>
	<p>Referent</p> <p>No pushing into water</p>
	<p>Function</p> <p>To prohibit pushing people into the water</p>
	<p>Image content</p> <p>Two human figures, one figure pushing the other figure, filled segment, two wavy lines</p>
<p>Hazard</p> <p>Being struck by the person pushed into the water</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not pushing people into the water</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P063
	Referent No body boarding
	Function To prohibit body boarding (or boogie boarding)
	Image content Human figure (right-hand profile), body board, two wavy lines
Hazard Body boards being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No body boarding	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P064</p>
	<p>Referent</p> <p>No surfing between the red-and-yellow flags</p>
	<p>Function</p> <p>To prohibit people using surf craft in designated swimming areas</p>
	<p>Image content</p> <p>Human figure (right-hand profile) on surfboard, two wavy lines, three curved lines, between two red-and-yellow rectangular shapes at the top of two vertical lines</p>
<p>Hazard</p> <p>Surf craft being in an area where they could collide with people in the water, between two red-and-yellow flags</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>No surf craft in designated swimming areas</p>	
<p>Additional information</p> <p>It is essential for the flags to be shown in this particular safety sign in the colours in which they are always used on the beach (and specified in ISO 20712-2:2007 as flag BF.03) to ensure understanding of the safety message and avoid confusion with other flags. In these unique circumstances, the red and yellow colours of this element of the graphical symbol are shown, in addition to the normal contrast colour of black.</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P065
	Referent No kite surfing
	Function To prohibit kite surfing
	Image content Human figure (right-hand profile) on surfboard, kite, two wavy lines, three curved lines
Hazard Kite surfers being in an area where they could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No kite surfing	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P066</p>
	<p>Referent</p> <p style="text-align: center;">No parasailing</p>
	<p>Function</p> <p>To prohibit parasailing</p>
	<p>Image content</p> <p>Human figure with parasail, tow rope, mechanically powered craft, two wavy lines</p>
<p>Hazard</p> <p>Parasailors and mechanically powered craft being in an area where they could collide with people on or in the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>No parasailing</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P067
	Referent No sand yachting
	Function To prohibit sand yachting
	Image content Sand yacht, sail, vertical line, horizontal line, two wheels
Hazard Sand yachts being in an area where they could collide with people on the beach	
Human behaviour that is intended to be caused after understanding the safety sign's meaning No sand yachting	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P068</p>
	<p>Referent</p> <p style="text-align: center;">Do not expose to direct sunlight or hot surface</p>
	<p>Function</p> <p>To prohibit exposure to direct sunlight or hot surface</p>
	<p>Image content</p> <p>Three parallel, vertical, s-shaped lines above a horizontal straight line and circle with radiating straight lines</p>
<p>Hazard</p> <p>Raised temperature due to direct sunlight or placement on hot surface can cause a harmful explosion</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not leaving the product exposed to direct sunlight or hot surface</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)


	Reference No. ISO 7010-P069
	Referent Not to be serviced by users
	Function To prohibit carrying out servicing by users
	Image content Screwdriver, open ended wrench (spanner)
Hazard Injury by hazards not recognizable by users	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Unqualified users not carrying out servicing	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-P070</p>
	<p>Referent</p> <p style="text-align: center;">Do not put finger into the nozzle of a hydromassage</p>
	<p>Function</p> <p>To prohibit putting a finger into the nozzle of a hydromassage</p>
	<p>Image content</p> <p>Hand with finger pointing into nozzle of water jet spray</p>
<p>Hazard</p> <p>Suction and entrapment of a single finger in the nozzle of a hydromassage, finger injuries, drowning in case of small children</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Not putting finger into the nozzle of a hydromassage</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 — Description and application of referent for warning signs (category W)


	Reference No. ISO 7010-W001
	Referent General warning sign
	Function To signify a general warning
	Image content Exclamation mark
Hazard Risk to people specified by the supplementary sign	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care regarding the hazard specified by the supplementary sign	
Additional information This safety sign cannot be used on its own and requires a supplementary sign to give further information about the hazard.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W002</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Explosive material</p>
	<p>Function</p> <p>To warn of explosive materials</p>
	<p>Image content</p> <p>Part of filled circle with radiating triangular lines and irregular shapes</p>
<p>Hazard</p> <p>Explosion</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when in the vicinity of or handling explosive materials</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W003</p>
	Referent <p style="text-align: center;">Warning; Radioactive material or ionizing radiation</p>
	Function <p>To warn of radioactive materials or ionizing radiation</p>
	Image content <p>Circle with three circular sectors around it</p>
Hazard <p>Radioactivity and ionizing radiation</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care to avoid exposure to radioactive material or ionizing radiation</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W004</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Laser beam</p>
	<p>Function</p> <p>To warn of a laser beam</p>
	<p>Image content</p> <p>Circle with 24 regular equally spaced radiating lines, 12 shorter of equal length, 11 longer of equal length and one longer reaching horizontally the right-hand side of the triangle</p>
<p>Hazard</p> <p>Laser beam</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid exposure to a laser beam</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W005
	Referent Warning; Non-ionizing radiation
	Function To warn of non-ionizing radiation
	Image content Circle with three arc-shaped lines of increasing length on each side symmetrically located, with a trapezoid underneath
Hazard Non-ionizing radiation	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid exposure to non-ionizing radiation	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W006</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Magnetic field</p>
	<p>Function</p> <p>To warn of a magnetic field</p>
	<p>Image content</p> <p>Hoop with two outlined sections at the bottom, two arc-shaped lines on each side of the outlined section</p>
<p>Hazard</p> <p>Strong magnetic field</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid exposure to a strong magnetic field</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W007
	Referent Warning; Floor-level obstacle
	Function To warn of a floor-level obstacle
	Image content Human figure falling forwards, thick horizontal line by forward leg
Hazard Floor-level obstacle	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of a floor-level obstacle	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W008</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Drop (fall)</p>
	<p>Function</p> <p>To warn of a drop</p>
	<p>Image content</p> <p>Human figure falling backwards from the edge of a surface</p>
<p>Hazard</p> <p>Drop</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when in the vicinity of a drop</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W009
	Referent Warning; Biological hazard
	Function To warn of a biological hazard
	Image content Circle overlaid by three equal pincer-shaped circles
Hazard Virus or toxin	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid exposure to a biological hazard	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W010</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Low temperature/ freezing conditions</p>
	<p>Function</p> <p>To warn of low temperature or freezing conditions</p>
	<p>Image content</p> <p>Snowflake</p>
<p>Hazard</p> <p>Low temperature or freezing conditions</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid exposure to low temperature or freezing conditions</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W011
	Referent Warning; Slippery surface
	Function To warn of a slippery surface
	Image content Human figure falling backwards, horizontal line underneath
Hazard Slippery surface	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid a slippery surface or being aware of it, taking care to avoid slipping	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	Reference No. ISO 7010-W012
	Referent Warning; Electricity
	Function To warn of electricity
	Image content Lightning bolt
Hazard Electricity	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid coming into contact with electricity	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W013</p>
	Referent <p style="text-align: center;">Warning; Guard dog</p>
	Function <p>To warn of a guard dog</p>
	Image content <p>Head of a dog (left-hand profile) with collar</p>
<p>Hazard Guard dog</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Not entering an area patrolled by a guard dog without ensuring that the dog is under control</p> <p>Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W014</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Forklift trucks and other industrial vehicles</p>
	<p>Function</p> <p>To warn of a forklift truck and other industrial vehicles</p>
	<p>Image content</p> <p>Forklift truck (left-hand profile) with human figure</p>
<p>Hazard</p> <p>Moving forklift trucks and other industrial vehicles</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid collision with moving forklift trucks and other industrial vehicles</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W015
	Referent Warning; Overhead load
	Function To warn of an overhead load
	Image content Box suspended at an angle from two ropes attached to a hook
Hazard Overhead load	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid being struck by or walking into an overhead load	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W016</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Toxic material</p>
	<p>Function</p> <p>To warn of toxic material</p>
	<p>Image content</p> <p>Skull (outlined), behind it two crossed bones (outlined)</p>
<p>Hazard</p> <p>Poisoning</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid coming into contact with toxic material</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W017
	Referent Warning; Hot surface
	Function To warn of a hot surface
	Image content Three parallel, vertical, s-shaped lines above a horizontal straight line
Hazard Hot surface	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid coming into contact with a hot surface	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W018</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Automatic start-up</p>
	<p>Function</p> <p>To warn of automatic activation</p>
	<p>Image content</p> <p>Circle with three connected curved lines</p>
<p>Hazard</p> <p>Automatically moving mechanical parts</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when in the vicinity of machinery with moving mechanical parts which may start automatically and thus unexpectedly</p> <p>Additional information</p> <p>The graphical symbol is standardized and registered as ISO 7000-0017 "Automatic control (closed loop)".</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W019</p>
	Referent <p style="text-align: center;">Warning; Crushing</p>
	Function <p>To warn of moving mechanical parts</p>
	Image content <p>Human figure between two hatched bars; an arrow from the right side pointing to the right bar and an arrow from the left side pointing to the left bar</p>
Hazard <p>Mechanical parts which can come together in a crushing movement</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care to avoid mechanisms with parts which can come together in a crushing movement</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W020</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Overhead obstacle</p>
	<p>Function</p> <p>To warn of an overhead obstacle</p>
	<p>Image content</p> <p>Upper human figure underneath an overhead obstacle and star to indicate contact</p>
<p>Hazard</p> <p>Overhead obstacle</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid being struck by or walking into an overhead obstacle</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W021
	Referent Warning; Flammable material
	Function To warn of flammable material
	Image content Flame, horizontal line underneath
Hazard Fire	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid causing a fire by igniting flammable material	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W022</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Sharp element</p>
	<p>Function</p> <p>To warn of a sharp element</p>
	<p>Image content</p> <p>Bandaged hand above a vertical line with a point</p>
<p>Hazard</p> <p>Sharp elements</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid injury from sharp elements (e.g. needles, blades)</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W023</p>
	Referent <p style="text-align: center;">Warning; Corrosive substance</p>
	Function <p>To warn of a corrosive substance</p>
	Image content <p>Hand with indentation, two test tubes, four droplets, thick line with indentation</p>
Hazard <p>Corrosive substance</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care when handling corrosive substances</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W024</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Crushing of hands</p>
	<p>Function</p> <p>To warn of a closing motion of mechanical parts of equipment</p>
	<p>Image content</p> <p>Hand between two horizontal lines, vertical arrow pointing downwards</p>
<p>Hazard</p> <p>Closing mechanical parts of equipment</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid injury to hands when in the vicinity of equipment with closing mechanical parts</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W025
	Referent Warning; Counterrotating rollers
	Function To warn of counterrotating rollers
	Image content Small circle with internal curved arrow pointing in anti-clockwise direction, large circle with internal curved arrow pointing in clockwise direction
Hazard Drawing-in movement	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of counterrotating rollers	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W026</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Battery charging</p>
	<p>Function</p> <p>To warn of batteries being charged</p>
	<p>Image content</p> <p>Box with cross and horizontal short line within; two filled squares directly located on the box above the cross and the horizontal short line; two curved lines above the filled square on the left side and irregular curved filled area at the right side of the box</p>
<p>Hazard</p> <p>Explosive atmosphere and acid</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Ensuring adequate ventilation of the charging area and taking care to avoid coming into contact with acid</p>	
<p>Additional information</p> <p>The graphical symbol is standardized and registered as ISO 7000-1152 "Battery open".</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W027
	Referent Warning; Optical radiation
	Function To warn of optical radiation
	Image content Star with 11 points with circle in centre
Hazard Optical radiation (such as UV, visible radiation, IR)	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid injury to eyes and skin when in the vicinity of optical radiation	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. If necessary, a supplementary sign shall be used to give further information about the kind of optical radiation (e.g. UV, visible radiation, IR).	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W028</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Oxidizing substance</p>
	<p>Function</p> <p>To warn of an oxidizing substance</p>
	<p>Image content</p> <p>Flame, circle, horizontal line</p>
<p>Hazard</p> <p>Fire</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when in the vicinity of oxidizing substances</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W029</p>
	Referent <p style="text-align: center;">Warning; Pressurized cylinder</p>
	Function <p>To warn of a pressurized cylinder</p>
	Image content <p>Cylinder at angle with radiating triangular lines and irregular shapes, flame and horizontal line underneath</p>
Hazard <p>Exploding pressurized cylinder</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Protecting pressurized cylinders from high temperatures or from being dropped or falling</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W030</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Hand crushing between press brake tool</p>
	<p>Function</p> <p>To warn of the closing jaws of a press brake tool</p>
	<p>Image content</p> <p>Press brake tool (punch and die), hand between punch and die, arrow pointing downwards</p>
<p>Hazard</p> <p>Closing jaws of a press brake tool</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid hands being caught between the jaws of a press brake tool</p> <p>Additional information</p> <p>This safety sign is a specific warning sign for hydraulic press brakes.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W031</p>
	Referent <p style="text-align: center;">Warning; Hand crushing between press brake and material</p>
	Function <p>To warn of the danger of hands being caught between a workpiece and the moving parts of a press brake</p>
	Image content <p>Hand crushed between the moving parts of a press brake and a workpiece, curved arrow pointing upwards</p>
Hazard <p>Moving press brake and workpiece</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care to avoid hands being caught between a workpiece and the moving parts of a press brake</p>	
Additional information <p>This safety sign is a specific warning sign for hydraulic press brakes.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W032</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Rapid movement of workpiece in press brake</p>
	<p>Function</p> <p>To warn of possible movement/deflection of a workpiece when operating a press brake</p>
	<p>Image content</p> <p>Protruding workpiece, press brake tool (punch and die), bending press brake operator with damaged head and shoulder, two curved arrows</p>
<p>Hazard</p> <p>Movement/deflection of a protruding workpiece in a press brake</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid a protruding workpiece in a press brake</p>	
<p>Additional information</p> <p>This safety sign is a specific warning sign for press brakes.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W033
	Referent Warning; Barbed wire
	Function To warn of barbed wire
	Image content Barbed wire
Hazard Barbed wire	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of barbed wire	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	Reference No. ISO 7010-W034
	Referent Warning; Bull
	Function To warn of bulls
	Image content Bull
Hazard Bull attack	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of bulls	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	Reference No. ISO 7010-W035
	Referent Warning; Falling objects
	Function To warn of falling objects
	Image content Upper human figure, four vertical lines, four different shapes
Hazard Falling objects	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of potential falling objects	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W036</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Fragile roof</p>
	<p>Function</p> <p>To warn of a fragile roof</p>
	<p>Image content</p> <p>Human figure on roof, pattern radiating from one foot</p>
<p>Hazard</p> <p>Fragile roof</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when on a fragile roof</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W037
	Referent Warning; Run over by remote operator-controlled machine
	Function To warn of a run over hazard by a remote operator-controlled machine
	Image content Human figure being run over by wheeled machine (outlined) with antenna, three curved lines
Hazard Moving remote operator-controlled machine	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when in the vicinity of a remote operator-controlled machine	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W038</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Sudden loud noise</p>
	<p>Function</p> <p>To warn of sudden loud noise</p>
	<p>Image content</p> <p>Human head (front view, outlined), hand, three curved lines</p>
<p>Hazard</p> <p>Sudden loud noise</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care in areas where there can be sudden loud noise</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W039
	Referent Warning; Falling ice
	Function To warn of falling ice from overhead
	Image content Upper human figure underneath falling black triangles with motion streaks
Hazard Falling ice	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid areas where ice falls from overhead structures	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p>ISO 7010-W040</p>
	<p>Referent</p> <p>Warning; Roof avalanche</p>
	<p>Function</p> <p>To warn of a roof avalanche</p>
	<p>Image content</p> <p>Human figure, house with a roof, group of ice crystals in different sizes</p>
<p>Hazard</p> <p>Falling mass of snow</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when in the vicinity of snow-covered roofs</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W041
	Referent Warning; Asphyxiating atmosphere
	Function To warn of asphyxiation
	Image content Human figure (right-hand profile) sitting, legs straight, head bent forward and arms hanging, dots around the head and upper body and into the lungs
Hazard Asphyxiation due to exposure to asphyxiating atmosphere	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid exposure to asphyxiating atmosphere	
Additional information Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

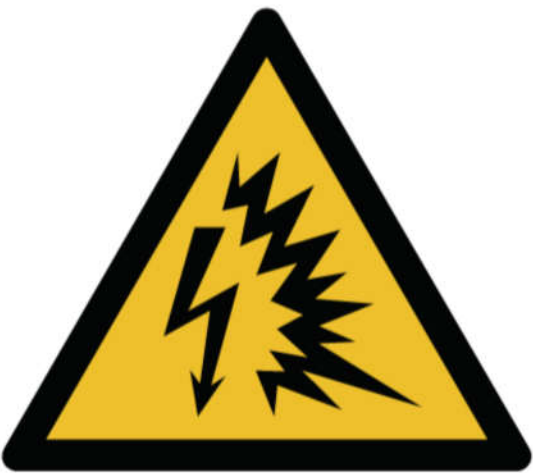
	Reference No. <p style="text-align: center;">ISO 7010-W042</p>
	Referent <p style="text-align: center;">Warning; Arc flash</p>
	Function <p>To warn of an arc flash</p>
	Image content <p>Lightning bolt (from ISO 7010-W012) and a multi-peaked jagged line of varying width</p>
Hazard <p>High energy electrical discharge between two electrically conductive materials</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care to avoid opening electrical enclosures unless electrical components are de-energized or specialized personal protective equipment is worn</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W043</p>
	Referent <p style="text-align: center;">Warning; Thin ice</p>
	Function <p>To warn of going onto thin ice</p>
	Image content <p>Human figure falling, radiating pattern originating from end of leg</p>
Hazard <p>Thin ice which people could fall through</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care when going onto thin ice</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W044</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Slipway</p>
	<p>Function</p> <p>To warn of a boat launching slipway</p>
	<p>Image content</p> <p>Sailing boat, wheel with bar, solid triangle, two wavy lines</p>
<p>Hazard</p> <p>Collision with a slipway or trolley being used to launch or retrieve a boat</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>People in the water taking care to avoid the slipway and sailing boats being launched</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W045</p>
	Referent <p style="text-align: center;">Warning; Towed water activity area</p>
	Function <p>To warn of towed water activity (e.g. water skiing, wakeboarding, doughnuts, banana craft)</p>
	Image content <p>Human figure (left-hand profile) on water skis, tow rope, two wavy lines</p>
<p>Hazard Water skis, wakeboards, doughnuts, banana craft or tow ropes being in an area where they could collide with people in the water</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when entering an area of towed water activity</p> <p>Additional information The tow rope needs to extend into the exclusion zone (as specified in ISO 3864-3) in order to convey clearly the image of a continuous tow rope extending outside the visual scene portrayed.</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W046</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Surf craft area</p>
	<p>Function</p> <p>To warn of surf craft (e.g. surfboards, surf skis, surf kayaks)</p>
	<p>Image content</p> <p>Human figure on surfboard, two wavy lines, three curved lines</p>
<p>Hazard</p> <p>Surf craft being in an area where they could collide with people in the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when entering an area of surf craft activity</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W047</p>
	Referent <p style="text-align: center;">Warning; Deep water</p>
	Function <p>To warn of deep water</p>
	Image content <p>Human figure with raised arm, single wavy line, double-ended arrow pointing between the single wavy line and a horizontal line</p>
<p>Hazard Area of water where people could get out of their depth</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when entering an area of deep water</p> <p>Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required. A supplementary text sign may be used to give the depth of water.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W048</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Shallow water (diving)</p>
	<p>Function</p> <p>To warn of diving into shallow water</p>
	<p>Image content</p> <p>Human figure diving, head in contact with horizontal line, single wavy line</p>
<p>Hazard</p> <p>Area of shallow water where people, if they dived, could strike the floor</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when diving in shallow water</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W049</p>
	Referent <p style="text-align: center;">Warning; Submerged objects</p>
	Function To warn of diving onto submerged objects in open water
	Image content Human figure diving, head and an arm in contact with objects, single wavy line
Hazard Area of water where people, if they dived, could strike submerged objects	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid striking submerged objects	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W050</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Sudden drop in swimming or leisure pools</p>
	<p>Function</p> <p>To warn of a sudden drop beneath water</p>
	<p>Image content</p> <p>Human figure falling, slope, horizontal line, single wavy line</p>
<p>Hazard</p> <p>Drop/slope under the water where people could get out of their depth</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid sudden drops under the water or being suitably aware of the hazard</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W051</p>
	Referent <p style="text-align: center;">Warning; Unprotected edge</p>
	Function <p>To warn of an unprotected edge to an aquatic environment (e.g. at parking area, dock side)</p>
	Image content <p>Car falling, edge of a land mass, two wavy lines</p>
Hazard <p>Vehicle falling over edge</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care when driving to avoid going over an unprotected edge of an aquatic environment</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p>ISO 7010-W052</p>
	<p>Referent</p> <p>Warning; Unstable cliff edge</p>
	<p>Function</p> <p>To warn of an unstable cliff edge</p>
	<p>Image content</p> <p>Human figure falling, edge of land mass, vertical line of three irregularly shaped dots</p>
<p>Hazard</p> <p>Falling off cliff</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid cliff edges</p> <p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W053
	Referent Warning; Unstable cliff
	Function To warn of rocks from unstable cliff
	Image content Human figure, irregularly shaped land mass, group of four irregular shapes
Hazard Falling rocks, unstable cliffs	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid being under cliffs that may be unstable	
Additional information Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 7 (continued)

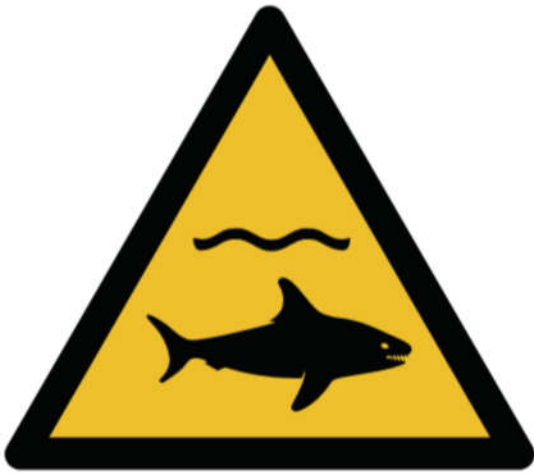
	Reference No. <p style="text-align: center;">ISO 7010-W054</p>
	Referent <p style="text-align: center;">Warning; Shark</p>
	Function <p>To warn of sharks</p>
	Image content <p>Shark, single wavy line</p>
Hazard <p>Shark attack</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care when entering the water due to the presence of dangerous sharks</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W055
	Referent Warning; Sewage effluent outfall
	Function To warn of sewage effluent outfall
	Image content Cylindrical shape, three curved lines, two wavy lines
Hazard Flow of discharged water and unhygienic material	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care to avoid the discharge from the effluent outfall	
Additional information The discharging pipe and ground may be dry. Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 7 (continued)


	<p>Reference No.</p> <p>ISO 7010-W056</p>
	<p>Referent</p> <p>Warning; Tsunami hazard zone</p>
	<p>Function</p> <p>To warn of tsunami waves</p>
	<p>Image content</p> <p>Rolling shape of a tsunami wave</p>
<p>Hazard</p> <p>Tsunami wave originating from an ocean floor seismic event in which people could be caught</p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Evacuation from coastal/beach zone towards higher ground inland in the event of an earthquake or when a tsunami warning has been issued</p> <p>Additional information</p> <p>This water safety sign has been the subject of extensive research by the Japanese Government and has also been requested by UNESCO as part of an overall approach to a management strategy designed to mitigate the disastrous effects of a tsunami wave. The design selected has received the best comprehension results and is specific to the special circumstances of the tsunami hazard. Supplementary text shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>The particular circumstances of the tsunami wave and its nature as a vast volume of water indicated that, for exceptional reasons, the "exclusion zone" (as specified in ISO 3864-3) should be entered to gain the best comprehension test results.</p>	

Table 7 (continued)


	Reference No. <p style="text-align: center;">ISO 7010-W057</p>
	Referent <p style="text-align: center;">Warning; Strong currents</p>
	Function <p>To warn of strong currents</p>
	Image content <p>Upper human figure with arms raised, two wavy lines with arrow heads</p>
Hazard <p>Strong currents hazardous to people undertaking aquatic activity</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care when entering the water where there can be strong currents</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W058</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Boating area</p>
	<p>Function</p> <p>To warn of boats (e.g. manually powered craft, mechanically powered craft, sailing craft)</p>
	<p>Image content</p> <p>Bow of boat with anchor, upper human figure with arms raised, two wavy lines</p>
<p>Hazard</p> <p>Boats could collide with people in the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when entering areas where there is boat activity</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W059
	Referent Warning; Sand yachting
	Function To warn of sand yachting
	Image content Sand yacht, sail, vertical line, horizontal line, two wheels
Hazard Sand yachts could collide with people on the beach	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when entering areas where there is sand yachting	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W060</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Incoming tides</p>
	<p>Function</p> <p>To warn of incoming tides</p>
	<p>Image content</p> <p>Human figure with arms raised standing between a high land mass and waves</p>
<p>Hazard</p> <p>Incoming tides that could cause people to become trapped</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when entering areas which could be cut off by incoming tides</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W061
	Referent Warning; Quicksand or mud/deep mud or silt
	Function To warn of quicksand or mud
	Image content Upper human figure with arms raised, solid mass
Hazard Quicksand or deep mud in which people could become trapped	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when entering areas of quicksand or mud	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W062</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Kite surfing</p>
	<p>Function</p> <p>To warn of kite surfing</p>
	<p>Image content</p> <p>Human figure, surfboard, kite, two wavy lines, two curved lines</p>
<p>Hazard</p> <p>Kite surfers could collide with people in the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when entering areas where there is kite surfing</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W063
	Referent Warning; Parasailing
	Function To warn of parasailing
	Image content Human figure with parasail, tow rope, mechanically powered craft, two wavy lines
Hazard Parasailors and mechanically powered craft could collide with people in the water	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when entering areas where there is parasailing	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)


	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W064</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Strong winds</p>
	<p>Function</p> <p>To warn of strong winds</p>
	<p>Image content</p> <p>Windssock, two ropes, vertical line</p>
<p>Hazard</p> <p>Strong winds can sweep people on or in the water away from the shore</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care when going out on, or into, the water when there are strong winds</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)


	Reference No. ISO 7010-W065
	Referent Warning; High surf or large breaking waves
	Function To warn of high surf or large breaking waves
	Image content Wave with a high rolling shape above human figure falling backwards
Hazard Large, rapidly moving mass of water in which people could be caught	
Human behaviour that is intended to be caused after understanding the safety sign's meaning Taking care when entering the water or getting too close to the water's edge, when there are large breaking waves	
Additional information Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)



	<p>Reference No.</p> <p style="text-align: center;">ISO 7010-W066</p>
	<p>Referent</p> <p style="text-align: center;">Warning; Deep shelving beach</p>
	<p>Function</p> <p>To warn of deep shelving beach</p>
	<p>Image content</p> <p>Human figure falling, edge of a land mass, six wavy lines</p>
<p>Hazard</p> <p>Sudden drop to deep water at the edge of a land mass, such as a beach, where people could fall unexpectedly because of the sudden change in the depth of the water</p>	
<p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p>Taking care to avoid sudden drops under the water or, being aware of these, taking suitable action when approaching them</p>	
<p>Additional information</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	Reference No. <p style="text-align: center;">ISO 7010-W067</p>
	Referent <p style="text-align: center;">Warning; Crocodiles, alligators or caymans</p>
	Function <p>To warn of crocodiles, alligators or caymans</p>
	Image content <p>Reptile head with open jaws, two wavy lines</p>
Hazard <p>Crocodile, alligator or cayman attack</p>	
Human behaviour that is intended to be caused after understanding the safety sign's meaning <p>Taking care in areas where crocodiles, alligators or caymans can be present</p>	
Additional information <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Bibliography

- [1] ISO 3864-2, *Graphical symbols — Safety colours and safety signs — Part 2: Design principles for product safety labels*
- [2] ISO 3864-4, *Graphical symbols — Safety colours and safety signs — Part 4: Colorimetric and photometric properties of safety sign materials*
- [3] ISO 7000, *Graphical symbols for use on equipment — Registered symbols*
- [4] ISO 7001, *Graphical symbols — Public information symbols*
- [5] ISO 9186-1, *Graphical symbols — Test methods — Part 1: Method for testing comprehensibility*
- [6] ISO 9186-2, *Graphical symbols — Test methods — Part 2: Method for testing perceptual quality*
- [7] ISO 9186-3, *Graphical symbols — Test methods — Part 3: Method for testing symbol referent association*
- [8] ISO 16069, *Graphical symbols — Safety signs — Safety way guidance systems (SWGS)*
- [9] ISO 17398, *Safety colours and safety signs — Classification, performance and durability of safety signs*
- [10] ISO 20712-2, *Water safety signs and beach safety flags — Part 2: Specifications for beach safety flags — Colour, shape, meaning and performance*

